

EVoline®



schulte invented and made by
elektrotechnik Schulte Elektrotechnik,
Lüdenscheid, Germany

EVOLine[®]

made in Germany

EVoline® Contents



Construction kit
Page 4



One
Page 6



Circle80
Page 13



BackFlip
Page 18



Square80
Page 21



Port Push
Page 25



FlipTop Push
Page 30



FrameDock
Page 35



Port
Page 39



V-Port
Page 45



Dock Square
Page 48



Dock
Page 51



R-Dock
Page 57



T-Dock
Page 61



V-Dock
Page 64



U-Dock
Page 68



Up
Page 72



Vertical
Page 75



Express
Page 78



Qi Charger
Page 91



Plug / PlugFix
Page 94



Sockets
Page 97



Power Connections & - Supplies
Page 107



Data- & Multimedia Modules
Page 111



Interchangeable Modules
Page 125




Consolidation Point
Page 137



Kinetics
Page 140



Cable Management
Page 143



Accessories
Page 151



Sales support
Page 154



EVOLine products freely configurable according to your wishes.

Ordering example

1. Select your EVOLine product

Port


Port *Push*

Dock Square

FlipTop *Push*

FrameDock

etc. ▶



2. Choose your modules

Socket modules

Data modules

Multimedia modules

Interchangeable modules

Power connection modules

etc. ▶



3. Your configuration







GERMAN
INNOVATION
AWARD '19
WINNER



reddot award 2019
winner

EVoline® One

One size fits all.

EVoline One - the compact power or data access point.



The round socket can be installed horizontally or vertically and can be adapted to the respective requirements thanks to the wide range of modular inserts.



*Available with
internationally
approved sockets.*



In addition to the variable inserts, EVoline also offers individually selectable rotating covers. Whether at the workplace, in the conference room, in the lounge area or in the kitchenette, the EVoline One provides fast and safe access to power or data - and in a very space-saving, discreet manner at that.








GERMAN
INNOVATION
AWARD '19
WINNER





reddot award 2019
winner

EVoline® One

Installation in upholstered furniture.

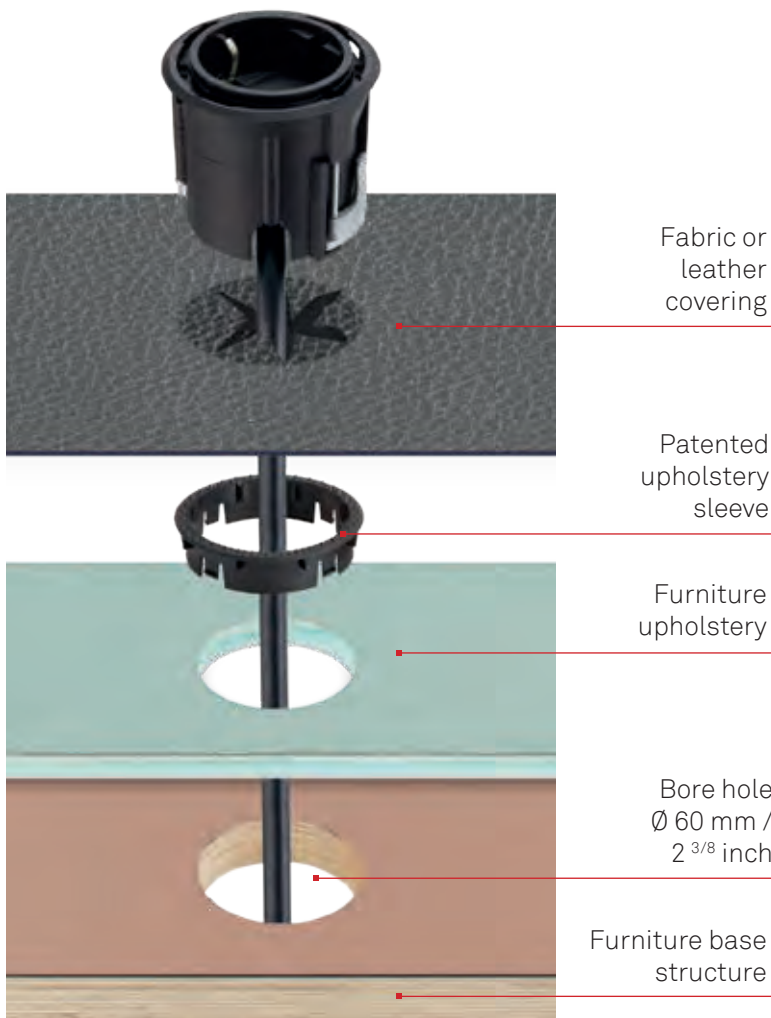



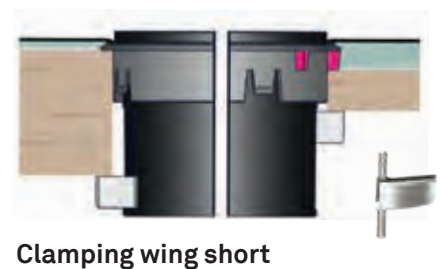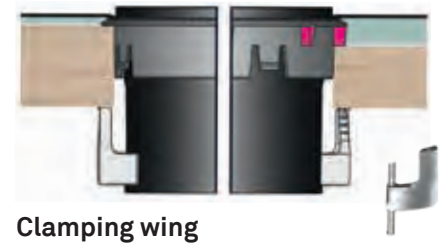



Upholstery sleeves for flat and high upholstery.



Description	Picture	Specifications	Order Number
<p>EVOLine One with VDE-socket</p> <p>Housing made of plastic Clamping wing made of metal</p>		<p>Housing color: black Ring color: black</p>	1592 8000 0900
<p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug.</p>		<p>Housing color: black Ring color: black with stainless steel inlay</p>	1592 8000 1100
		<p>Housing color: white Ring color: white</p>	1592 8000 4300
		<p>Housing color: white Ring color: white with stainless steel inlay</p>	1592 8000 6100
<p>EVOLine One with VDE-socket and lid</p> <p>Housing and lid made of plastic Clamping wing made of metal</p>		<p>Housing color: black Lid color: black</p>	1592 8000 4100
<p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug.</p>		<p>Housing color: black Lid color: black with stainless steel inlay</p>	1592 8000 3900
		<p>Housing color: white Lid color: white</p>	1592 8000 4200
		<p>Housing color: white Lid color: white with stainless steel inlay</p>	1592 8000 6200

Description	Picture	Specifications	Order Number
<p>EVoline One with double USB Charger</p>		<p>Housing color: black Ring color: black</p>	1592 8000 1200
<p>Housing made of plastic Clamping wing made of metal</p>		<p>Housing color: black Ring color: black with stainless steel inlay</p>	1592 8000 1400
<p>Double USB Charger Type A, 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug.</p>		<p>Housing color: white Ring color: white</p>	1592 8000 1300
		<p>Housing color: white Ring color: white with stainless steel inlay</p>	1592 8000 6300
<p>EVoline One with double USB Charger and lid</p>		<p>Housing color: black Lid color: black</p>	1592 8000 4400
<p>Housing and lid made of plastic Clamping wing made of metal</p>		<p>Housing color: black Lid color: black with stain- less steel inlay</p>	1592 8000 4000
<p>Double USB Charger Type A, 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug.</p>		<p>Housing color: white Lid color: white</p>	1592 8000 4500
		<p>Housing color: white Lid color: white with stain- less steel inlay</p>	1592 8000 6400

Description	Picture	Specifications	Order Number
<p>Configurable Basic Housing EVOLine One</p> <p>Housing made of plastic Clamping wing made of metal</p> <p>Please state the following in your purchase order: Clamping wing: for mounting surface thickness of 9mm to 25mm Clamping wing, short: for mounting surface thickness of 21mm to 38mm</p>		<p>Housing</p> <p>black, for electricity</p> <p>black, for data</p> <p>white, for electricity</p> <p>white, for data</p>	<p>9332 3280 0000</p> <p>9332 3590 0000</p> <p>9332 3290 0000</p> <p>9332 3600 0000</p>
<p>EVOLine One ring</p>		<p>black / white with stainless steel insert</p> <p>Please indicate the colour when ordering</p>	<p>9332 3520 0000</p>
<p>EVOLine One ring</p>		<p>black / white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3510 0000</p>
<p>EVOLine One ring with lid</p>		<p>black / white with stainless steel insert</p> <p>Please indicate the colour when ordering</p>	<p>9332 3560 0000</p>
<p>EVOLine One ring with lid</p>		<p>black / white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3550 0000</p>
<p>EVOLine upholstery sleeve</p> <p>Additional fixing sleeve for installation in an upholstered piece of furniture</p>		<p>Flat upholstery sleeve (Upholstery thickness of up to 5,5 mm max.)</p> <p>High upholstery sleeve (Upholstery thickness of up to 11 mm max.)</p>	<p>9332 3490 0000</p> <p>9332 3500 0000</p>



INPUT

EXIT

EVoline®

2.5A max.
250V max.



Available with internationally approved sockets.

The three-in-one solution for your workstation.

The EVoline Circle80 unites three functions in one in an intelligent way: power socket, double USB charger and cable aperture.


Optional finishing modules enable further individualisation. Cable attachment, covering or mounting of EVoline modules.









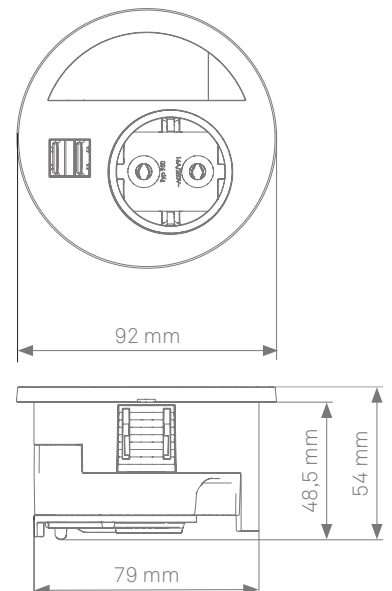

Bore hole Ø 80 mm for panel thicknesses from 10 mm.










The handy cable aperture with integrated slider for locking the cable makes excess cable disappear elegantly from the table. The low installation depth and the EVoline fastening system guarantee simple and fast assembly.



Description	Picture	Specifications	Order Number
<p>EVoline Circle80</p> <p>Type 927-3 1 x VDE-socket, 16 A, with contact-protection 1 x Double USB Charger 2,1 A fixed power cable 3 m with protective contact angle plug.</p>		<p>without cover plate</p> <p>black</p> <p>white</p>	<p>1592 7300 0900</p> <p>1592 7300 1000</p>
		<p>incl. cover plate completely closed</p> <p>black</p> <p>white</p>	<p>1592 7300 3000</p> <p>1592 7300 3600</p>
		<p>incl. cover plate with 6 cable outlets (each 2 x 4, 7 und 9 mm)</p> <p>black</p> <p>white</p>	<p>1592 7300 3100</p> <p>1592 7300 3700</p>

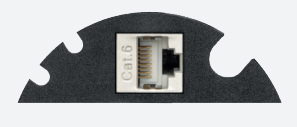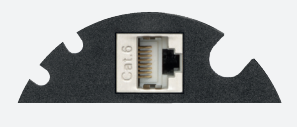Description	Picture	Specifications	Order Number
<p>EVOLine Circle80 incl. cover plate with multimedia applications</p> <p>With 3 cable outlets (2 x 4 mm, 1 x 9 mm)</p>		<p>RJ45 Cat. 6 shielded socket - socket, without cable</p> <p>black</p> <p>white</p>	<p>1592 7300 3200</p> <p>1592 7300 3800</p>
		<p>RJ45 Cat. 6A shielded socket - socket, without cable</p> <p>black</p> <p>white</p>	<p>1592 7300 3300</p> <p>1592 7300 3900</p>
		<p>USB 3.0 socket - socket, without cable</p> <p>black</p> <p>white</p>	<p>1592 7300 3400</p> <p>1592 7300 4000</p>
		<p>HDMI 2.0 socket - socket, without cable</p> <p>black</p> <p>white</p>	<p>1592 7300 3500</p> <p>1592 7300 4100</p>
		<p>USB-C 3.1 socket with 0,5 m cable and USB-C plug (Power: 3 A max. 60 watts data: up to 5 Gbit / s)</p> <p>black</p> <p>white</p>	<p>1592 7300 4300</p> <p>1592 7300 4400</p>

Description	Picture	Specifications	Order Number
EVoline cover plate for Circle80		completely closed	
		black	1599 0911 8800
		white	1599 0911 8900
		with 6 cable outlets (each 2 x 4, 7 und 9 mm)	
		black	1599 0911 8600
		white	1599 0911 8700
EVoline cover plate with multimedia applications for Circle80		RJ45 Cat. 6 shielded socket - socket, without cable	
With 3 cable outlets (2 x 4 mm, 1 x 9 mm)		black	1599 0911 9200
		white	1599 0911 9300
		RJ45 Cat. 6A shielded socket - socket, without cable	
		black	1599 0912 3300
		white	1599 0912 3400
		USB 3.0 socket - socket, without cable	
		black	1599 0911 9600
		white	1599 0911 9700
		HDMI 2.0 socket - socket, without cable	
		black	1599 0912 4200
		white	1599 0912 4300
		USB-C 3.1 socket with 0,5 m cable and USB-C plug (Power: 3 A / max. 60 watts data: up to 5 Gbit / s)	
		black	1599 0912 3100
		white	1599 0912 3200





reddot design award |
winner 2015



EVoline® BackFlip

Electricity and water - not a problem.

Always available, but never in the way. When closed, the EVoline BackFlip is only a thin panel on the desktop. Push it with a finger and it rotates by 180 degrees to show its useful side: USB charger and power sockets are

located so far above the panel that they are protected against water running in from the side.

The low installation depth of just 53 mm allows mounting even above drawers or devices.



Available with
internationally
approved
sockets.




Quick assembly in panels of 10 - 40 mm in thickness.



Flush mounted
installation
possible.

Surfaces match the ambience:




Stainless steel:
brushed



Stainless steel:
matt black



Stainless steel:
matt white




Ceramic:
concrete look






Glass:
glossy black

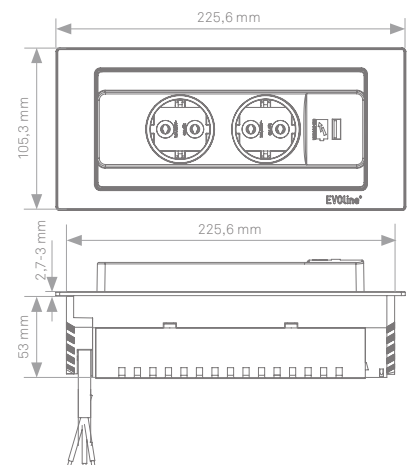

Glass:
matt white



EVoline® BackFlip

Description	Picture	Specifications	Order Number
EVoline BackFlip 2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, 5 V / 1 A Fixed Power Supply Cable 3.0 m with angled plug.		Cover Brushed Stainless Steel	1592 7100 0200
		Cover Glass, frosted white	1592 7100 2000
		Cover Glass, glossy black	1592 7100 2100
		Cover matt white lacquered	1592 7100 5000
		Cover matt black lacquered	1592 7100 5100
		Cover Ceramic, concrete look	1592 7101 3700
EVoline BackFlip with EVoline PlugFix 2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, 5 V / 1 A Fixed Power Supply Cable 3.0 m with EVoline PlugFix.		Cover Brushed Stainless Steel	1592 7100 0900
		Cover Glass, frosted white	1592 7100 2200
		Cover Glass, glossy black	1592 7100 2300
		Cover Ceramic, concrete look	1592 7101 3800
EVoline BackFlip CUISINE 2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, 5 V / 1 A, Fixed Power Supply Cable 2.5 m Plug supplied unattached		Cover Brushed Stainless Steel	1592 7100 0100
		Cover Glass, frosted white	1592 7100 1800
		Cover Glass, glossy black	1592 7100 1700
		Cover matt white lacquered	1592 7100 5200
		Cover matt black lacquered	1592 7100 5300
		Cover Ceramic, concrete look	1592 7101 3200

Qi-READY
iPhone + Android





DESIGN
AWARD
2015



GERMAN
DESIGN
AWARD
NOMINEE
2016

EVoline[®] Square80

Innovation in the smallest space.

Cable apertures with a diameter of 80 mm are standard in desks. The standard opening in the desk-top can offer more than a hole with a cover though:



Available with
internationally
approved sockets.

Available surfaces



Stainless steel
look



Black







White



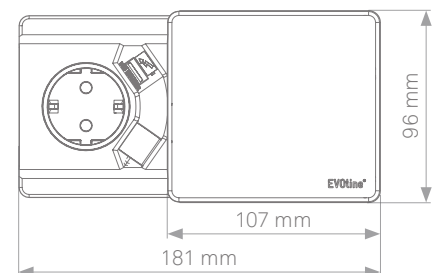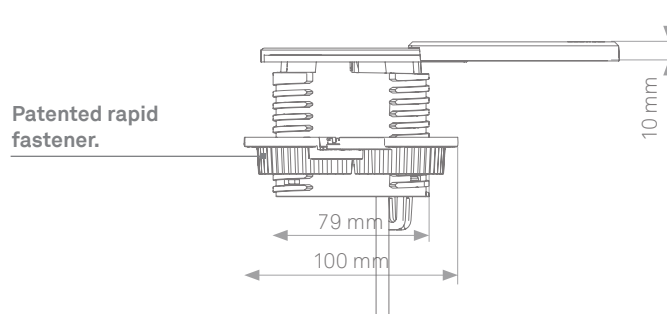


The EVoline Square80 houses a power socket, a USB charger and a network connection in a diameter of 80 mm. The EVoline Square80 makes a smart offer even in the closed state:

In the optional Qi version, the sliding cover is designed as an inductive charging point, on which suitable mobile phones can be charged wirelessly.



Description	Picture	Specifications	Order Number
<p>EVOLine Square80</p> <p>1x VDE-socket, 16 A, contact protected 1x USB Charger Type A, 5 V / 1 A Fixed supply cable 3 m with angled plug.</p>		Cover and housing black	1592 7000 0100
		CAT 6 Socket 3.0 m Cable and plug	
		3.0 m pull out CAT 6 patch cable	1592 7000 0200
		2x USB Charger	1592 7001 6300
		without data	1592 7000 0300
		Cover and housing white	
		CAT 6 Socket 3.0 m Cable and plug	1592 7000 1900
		3.0 m pull out CAT 6 patch cable	1592 7000 2000
		2x USB Charger	1592 7001 6400
without data	1592 7000 2100		
Cover in stainless steel optics housing in black		CAT 6 Socket 3.0 m Cable and plug	1592 7000 3100
3.0 m pull out CAT 6 patch cable		1592 7000 3200	
2x USB Charger		1592 7001 6500	
without data		1592 7000 3300	

Description	Picture	Specifications	Order Number
<p>EVoline Square80 with Wireless Charger</p> <p>1x VDE-socket, 16 A, contact protected 1x USB Charger Type A, 5 V / 1 A 1x Wireless Charger Fixed supply cable 3 m with angled plug.</p>		<p>Cover and housing black</p> <p>3.0 m Cable and plug CAT 6 Socket</p> <p>3.0 m pull out CAT 6 patch cable</p> <p>without data</p>	<p>1592 7000 0400</p> <p>1592 7000 0500</p> <p>1592 7000 0600</p>
		<p>Cover and housing white</p> <p>3.0 m Cable and plug CAT 6 Socket</p> <p>3.0 m pull out CAT 6 patch cable</p> <p>without data</p>	<p>1592 7000 2200</p> <p>1592 7000 2300</p> <p>1592 7000 2400</p>
		<p>Cover in stainless steel optics housing in black</p> <p>3.0 m Cable and plug CAT 6 Socket</p> <p>3.0 m pull out CAT 6 patch cable</p> <p>without data</p>	<p>1592 7000 3400</p> <p>1592 7000 3500</p> <p>1592 7000 3600</p>



Wireless charging

- inductive coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges any Qi compatible device
- transmitter coil is active only when a connection to the receiving device is made





EVOLine® Port Push

Push to open.

With the push-to-open function, all important connections are instantly available on the desktop at the touch of a finger.

In the connected state, the EVOLine Port Push disappears into the desktop with a gentle push.

The patented cover function allows the cables to pass through.




Patented cover function.

Fully retractable even when connected.



Freely configurable according to your wishes.

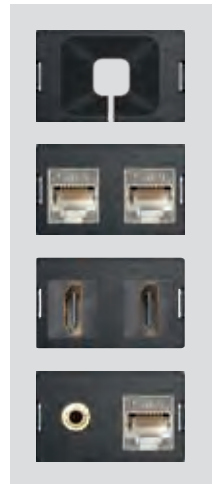

Always exchangeable.

Interchangeable modules for data and multimedia.

Surfaces match the ambience.



Stainless steel:
brushed

Black
lacquered





Glass:
matt white

Glass:
glossy black





Fast and simple mounting.

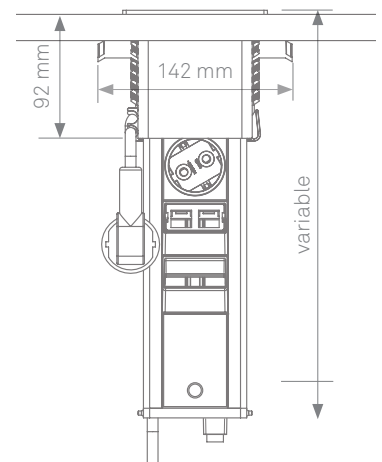For panel thicknesses from 10 - 50 mm.



EVoline® Port Push

Description	Picture	Specifications	Order Number
<p>EVoline Port Push</p> <p>Aluminium housing silver anodized. 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p>		<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	1593 1100 0300
<p>EVoline Port Push</p> <p>Aluminium housing silver anodised. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected Fixed supply cable 3.0 m with angled plug.</p>		<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	1593 1100 0400

Surface- / Colour-variations



Brushed stainless steel



Black lacquered



White glass (frosted)



Black glass (gloss)

Description	Picture	Specifications	Order Number
<p>EVoline Port Push Cuisine</p> <p>Aluminium housing, silver anodised. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>		<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	<p>1593 1100 0100</p>
<p>EVoline Port Push Cuisine Charger</p> <p>Aluminium housing, silver anodised. 1 × USB-Charger Type A, 5 V / 1 A 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>		<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	<p>1593 1100 0200</p>

EVOLine® Port *Push*

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

EVOLine Port Push DATA

Aluminium housing, silver anodised.
 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected.
 2 × modular couplings CAT 6 shielded, 1:1 interconnected.
 Fixed supply cable 3.0 m with angled plug.



Cover and collar in black plastic with brushed stainless steel inlay

1593 1100 0500

EVOLine Port Push CHARGER

Aluminium housing, silver anodised.
 2 × USBCharger Typ A, 5 V / 1 A
 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected.
 Fixed supply cable 3.0 m with angled plug.



Cover and collar in black plastic with brushed stainless steel inlay

1593 1100 0600

K Configure your individual EVOLine Port *Push* using the EVOLine Modular System. See page 4-5 for instructions.

Configurable Basic Housing EVOLine Port Push

Aluminium housing, silver anodised.



Cover and collar inlay

brushed stainless steel 9332 0040 0000

frosted white glass 9332 1020 0000

glossy black glass 9332 1030 0000

black lacquered 9332 5200 0000

Configurable Basic Housing EVOLine Port Push BLACK

Aluminium housing, black anodised.



Cover and collar inlay

brushed stainless steel 9332 4940 0000

frosted white glass 9332 4950 0000

glossy black glass 9332 4960 0000

black lacquered 9332 5210 0000



Opens at the touch of a finger.

The EVoline FlipTop Push is an elegant built-in solution for all work areas that need to be supplied with power, data and multimedia connections.



Freely configurable according to your wishes.





Flush mounted installation possible.

Fast mounting in panels up to 50 mm in thickness.

Practical cable routing ensures tidiness under the desk.

Adapter clip for secure WireLane connection.

Interchangeable modules can be exchanged at any time. Fast and easy mounting or dismounting.

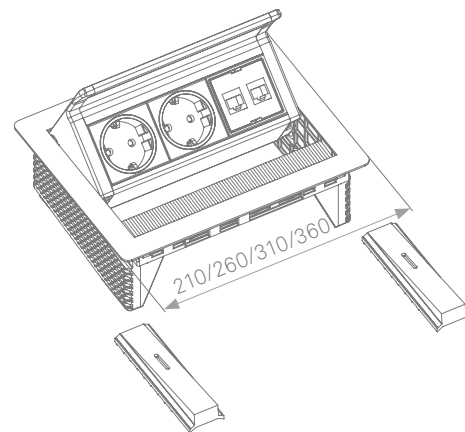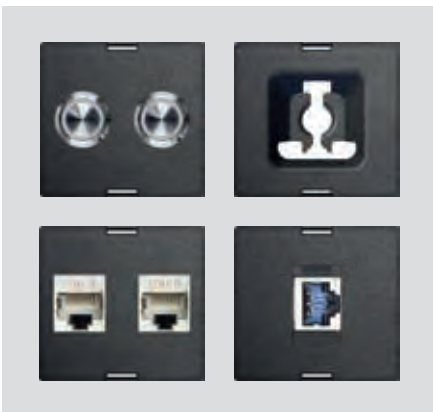

Available surfaces



Stainless steel:
brushed




Stainless steel:
matt black








Stainless steel:
matt white

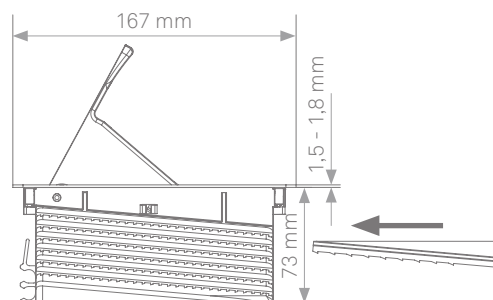

Stainless steel:
matt grey



EVoline® FlipTop Push

Description	Picture	Specifications	Order Number
<p>EVoline FlipTop Push S</p> <p>3× sockets, VDE-compliant 60°, 16 A, contact-protected Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7002 4900
<p>EVoline FlipTop Push Data S</p> <p>2× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× Cat.6 modular couplings, shielded Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7002 8100
<p>EVoline FlipTop Push M</p> <p>4× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7000 2700
<p>EVoline FlipTop Push M</p> <p>2× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× installation space for interchan- geable modules Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7010 1400
<p>EVoline FlipTop Push Data M</p> <p>3× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× Cat.6 modular couplings, shielded Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7000 0200

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

K Configure your individual EVoline FlipTop Push using the EVoline Modular System. See page 4-5 for instructions.

**Configurable Basic Housing
EVoline FlipTop Push S**

For 3 modules
Housing made of black anodised aluminium,
Installation dimensions: 157 × 195 mm



Cover	brushed stainless steel	9331 8010 0000
	black powder-coated	9331 9360 0000
	white powder-coated	9331 9630 0000
	grey powder-coated	9331 9670 0000

**Configurable Basic Housing
EVoline FlipTop Push M**

For 4 modules
Housing made of black anodised aluminium,
Incl. WireLane Adaptor
Installation dimensions: 157 × 245 mm



Cover	brushed stainless steel	9331 8020 0000
	black powder-coated	9331 9370 0000
	white powder-coated	9331 9640 0000
	grey powder-coated	9331 9680 0000

**Configurable Basic Housing
EVoline FlipTop Push L**

For 5 modules
Housing made of black anodised aluminium,
Incl. WireLane Adaptor
Installation dimensions: 157 × 295 mm



Cover	brushed stainless steel	9331 8030 0000
	black powder-coated	9331 9380 0000
	white powder-coated	9331 9650 0000
	grey powder-coated	9331 9690 0000

**Configurable Basic Housing
EVoline FlipTop Push XL**

For 6 Modules
Housing made of black anodised aluminium,
Incl. WireLane Adaptor
Installation dimensions: 157 × 345 mm





Cover	brushed stainless steel	9331 8040 0000
	black powder-coated	9331 9390 0000
	white powder-coated	9331 9660 0000
	grey powder-coated	9331 9700 0000

**Configurable Basic Housing
EVoline FlipTop Push white**

For 3-6 Modules
Housing made of white powder-coated aluminium,
cover white powder-coated,
Incl. WireLane Adaptor



S		9332 3980 0000
M		9332 3990 0000
L		9332 4000 0000
XL		9332 4010 0000

Description	Picture	Specifications	Order Number
<p>EVOLine WireLane Adaptor</p> <p>To connect WireLane to FlipTop Push.</p>			1599 0910 3300
<p>EVOLine FlipTop Push TRAY</p> <p>black powder-coated. For protection and cover below the table. Also applicable as cable tray.</p>		<p>for FlipTop Push S</p> <p>for FlipTop Push M</p> <p>for FlipTop Push L</p> <p>for FlipTop Push XL</p>	<p>1599 0910 8600</p> <p>1599 0910 8700</p> <p>1599 0910 8800</p> <p>1599 0910 8900</p>




Individuality ex works.

The EVoline FrameDock mounts flush with horizontal or vertical surfaces, be it a desktop, a worktop in the kitchen, a wall or the lateral surface of a piece of furniture. The low installation depth facilitates the choice of location.



Freely configurable according to your wishes.

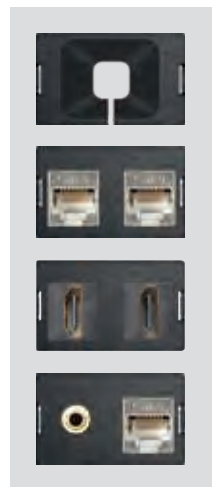

Always exchangeable.

Interchangeable modules make it timeless and it grows with the requirements. Fast and easy mounting or dismantling.

Available surfaces



Silver / black




Silver



Black




White

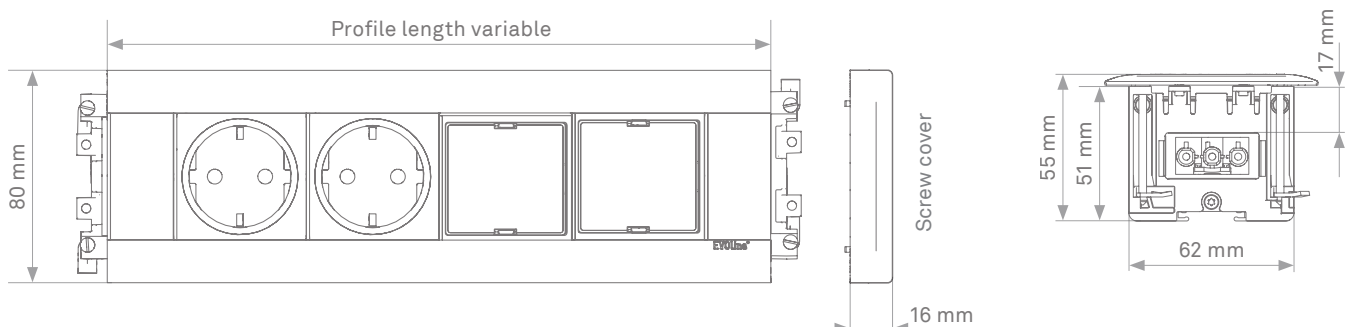


Examples of power supply options:

Fixed power supply cable through the bottom of the profile

Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3 or WAGO WINSTA connector

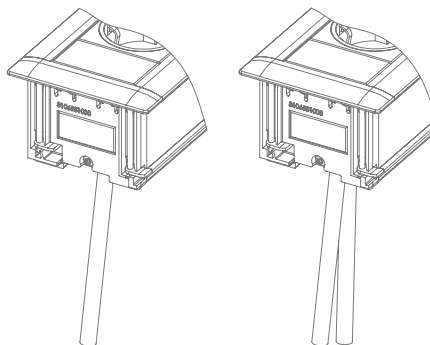


End cap with power input or output connector, depending on the surface thickness (max. 18 mm)

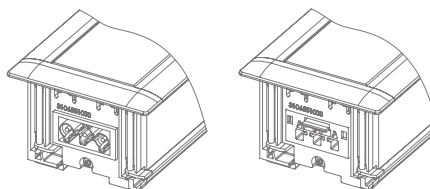

End cap with fixed power supply cable, depending on the surface thickness (max. 18 mm)

Available with several country specific plugs, EVOLine Plug, wire end ferrules, Wieland GST 18i3 or WAGO WINSTA connector

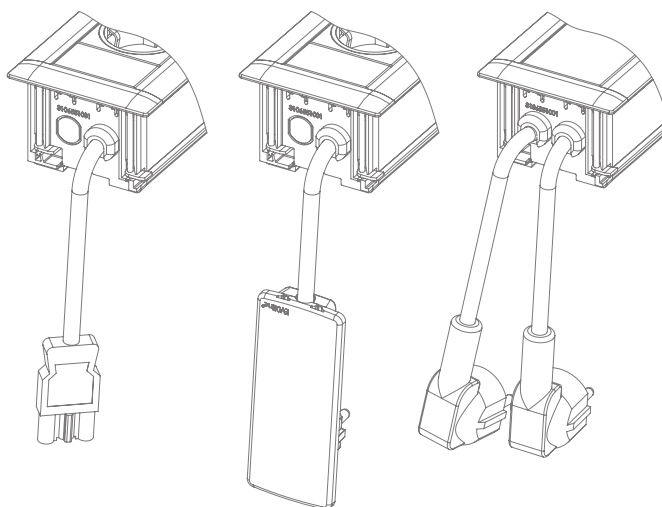

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

EVOLine FrameDock SMALL

Aluminium housing, silver anodised, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Powersupply cable entry left side in the bottom of the profile.



Profile silver anodised Screw covers black plastic	1596 1000 0900
Profile black Screw covers black plastic	1596 1001 9500
Profile white Screw covers white plastic	1596 1001 7900

Installation Dimensions:
71 mm × 225 mm

EVOLine FrameDock DATA SMALL'

Aluminium housing, silver anodised 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× Cat.6 modular couplings Power and data cable entry in the bottom of the profile.



Profile silver anodised Screw covers black plastic	1596 1000 1000
Profile black Screw covers black plastic	1596 1001 9600
Profile white Screw covers white plastic	1596 1001 8000

Installation Dimensions:
71 mm × 280 mm

K Configure your individual EVOLine FrameDock using the EVOLine Modular System. See page 4-5 for instructions

Configurable Basic Housing FrameDock

For surface thickness up to 38 mm



Profile silver anodised Screw covers black plastic	9331 2180 0000
Profile Silver anodised Screw covers silver lac- quered plastic	9331 2550 0000
Profile black anodised Screw covers black plastic	9331 5330 0000
Profile white powder- coated Screw covers white plastic	9331 3540 0000





red dot
design award

EVOLine® Port

There when you need it.

Just pull the EVOLine Port out of the worktop. Connect and lower again with a gentle push.

The patented rocking cover leaves space for the cables so that only the surface is visible in the connected state.



Freely configurable according to your wishes.



Cover surfaces



Plastic:
silver



Stainless steel:
solid



Plastic:
white



Plastic:
black



Steel:
chrome-plated



Plastic:
old brass

LED Nightlight



Ruby red



Emerald green



Silver colours
anodised



Black anodised



Night blue



Soft white






Antique brass
colored anodized



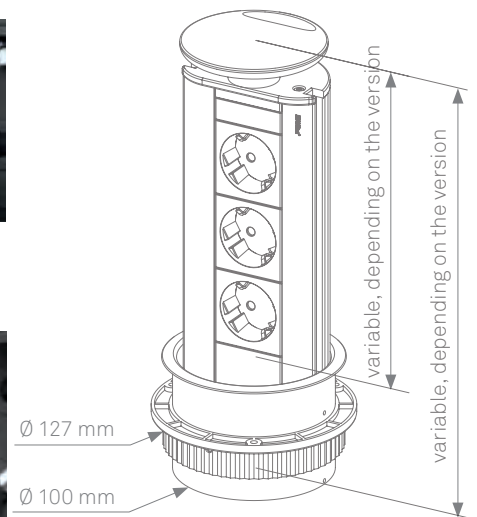

Chrome plated

Profile colours



Description	Picture	Specifications	Order Number	
<p>EVOLine Port</p> <p>Aluminium housing, silver anodised.</p> <p>2× sockets, VDE-compliant, 60°, 16 A contact-protected</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1000 3300	
			<p>Rocking cover and collar made of black lacquered plastic</p>	1593 1000 5200
			<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	1593 1003 1100
			<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics.</p> <p>Blue NIGHTLIGHT effect</p>	1593 1003 1200
<p>EVOLine Port</p> <p>Aluminium housing, silver anodised.</p> <p>3× sockets, VDE-compliant 60°, 16 A, contact-protected</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1000 0100	
			<p>Rocking cover and collar made of black lacquered plastic</p>	1593 1000 5000
			<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	1593 1002 1600
			<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics.</p> <p>Blue NIGHTLIGHT effect</p>	1593 1003 1300

Description	Picture	Specifications	Order Number
<p>EVOLine Port Cuisine</p> <p>Aluminium housing, silver anodised.</p> <p>3× sockets, VDE-compliant, 60°, 16 A contact-protected</p> <p>Fixed supply cable 2.5 m with wire end ferrules</p> <p>Plug supplied unattached.</p>		<p>Rocking cover made of silver lacquered plastic, Collar made of grey plastic</p>	<p>1593 1000 0600</p>
<p>EVOLine Port DATA</p> <p>Aluminium housing, silver anodised.</p> <p>2× sockets, VDE-compliant, 60°, 16 A contact-protected</p> <p>Fixed supply cable 3.0 m with angled plug.</p> <p>2× modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	<p>1593 1003 1400</p>
		<p>Rocking cover and collar made of black lacquered plastic</p>	<p>1593 1003 1500</p>
		<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	<p>1593 1003 1600</p>
		<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect</p>	<p>1593 1003 1700</p>

Description	Picture	Specifications	Order Number
<p>EVOLine Port DATA</p> <p>Aluminium housing, silver anodised.</p> <p>3× sockets, VDE-compliant, 60°, 16 A contact-protected.</p> <p>2× Cat. 6 modular couplings</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1003 1800
<p>Rocking cover and collar made of black lacquered plastic</p>		1593 1003 1900	
<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>		1593 1003 2000	
<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect</p>		1593 1003 2100	
<p>EVOLine Port USB-CHARGER</p> <p>Aluminium housing, silver anodised.</p> <p>2x sockets, VDE-compliant, 60°, 16 A, contact-protected.</p> <p>1x USB Type A Charger, 5V / 1 A</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1040 0200
<p>Rocking cover and collar made of black lacquered plastic</p>		1593 1040 0300	
<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>		1593 1040 0400	
<p>EVOLine Port 2x USB-CHARGER</p> <p>Aluminium housing, silver anodised.</p> <p>2x sockets, VDE-compliant, 60°, 16 A, contact-protected</p> <p>2× USB-Charger Type A, 5 V / 1 A</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1038 4100
<p>Rocking cover and collar made of black lacquered plastic</p>		1593 1038 7100	
<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>		1593 1038 7200	

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

K Configure your individual EVoline Port using the EVoline Modular System
 See page 4-5 for instructions

**Configurable Basic Housing
EVoline Port**

Aluminium housing
silver anodised.

Mounting hole ø 102 mm.



Rocking cover and collar
made of silver lacquered
plastic

9330 1830 0000

Rocking cover made of
solid stainless steel in CD
design, collar made of pla-
stic, lacquered in stainless
steel optics

9330 1360 0000

**Configurable Basic Housing
EVoline Port CLASSIC**

Aluminium housing
plated in antique brass colour.

Mounting hole ø 102 mm



Rocking cover and collar
made of antique brass
colored anodized

9330 2710 0000

**Configurable Basic Housing
EVoline Port CHROME**

Chrome plated aluminium housing

Mounting hole ø 102 mm.



Rocking cover made of
chromed steel,
collar made of black
lacquered plastic

9330 2750 0000

**Configurable Basic Housing
EVoline Port BLACK**

Aluminium housing
black anodised.

Mounting hole ø 102 mm.



Rocking cover and collar
made of black lacquered
plastic

9330 5560 0000

**Nightlight LED Modul
for EVoline Port**

LEDs underneath rocking cover



Light colour: night blue

9330 3830 0000

Light colour: ruby red

9330 3840 0000

Light colour: emerald green

9330 5790 0000



Light colour: soft white

9331 0260 0000



**Uses every corner of space.
For kitchens, bars and offices.**

There is almost always space underneath wall cupboards in the kitchen - especially in the corner adjacent to the wall or the next wall cupboard. And this is precisely where the EVOLine V-Port is mounted. The V-Port is connected via a

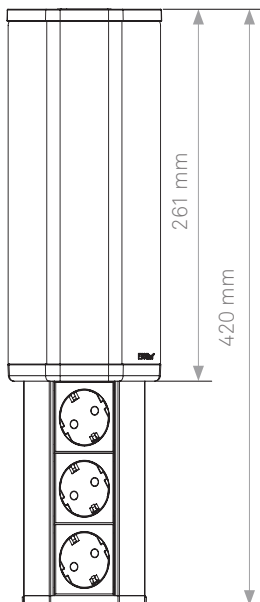

Available with
internationally
approved sockets.

special plug-in module on the top. The V-Port is enclosed in an elegant housing with an aluminium cover with a stainless steel look. With a gentle push it becomes a variably connectable multiple socket, optionally with a USB charger.

Description	Picture	Specifications	Order Number
<p>EVoline V-Port 2-gang</p> <p>2× VDE-compliant sockets, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0200</p>
<p>EVoline V-Port 3-gang</p> <p>3× VDE-compliant sockets, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plugin connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0100</p>
<p>EVoline V-Port 2-gang with USB-Charger</p> <p>2× VDE-compliant sockets, 60°, 16 A, contact-protected 1x USB Type A Charger, 5 V / 1 A Supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0300</p>



EVoline® Dock Square

Variable and mobile. Entirely in accordance with your wishes.

The EVoline Dock Square, the modern generation of the desktop systems, combines compactness, variability and mobility at the work place.

Simple adhesive mounting facilitates the assembly. The adhesive bond can be released at any time.



From the Dock Square standard variant to the individually configured versions, interchangeable data and multimedia modules ensure limitless flexibility at all times if your usage requirements should change.

Optional fastening option with stainless steel clamps for the edge of the desktop.



Freely configurable according to your wishes

Optional.
End caps for mounting the Fujitsu USB Port Replicator PR09.

Available surfaces




Silver



Black



White

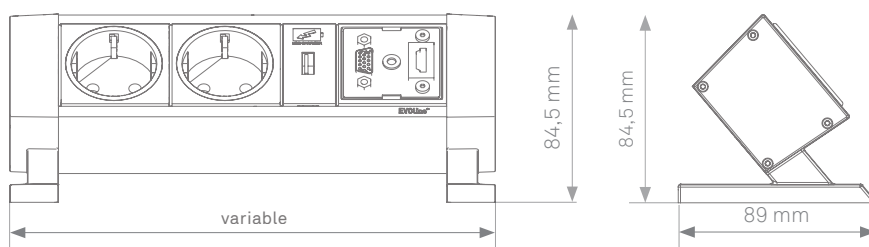

EVoline® Dock Square

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

EVoline Dock Square

Aluminium housing.
 2 × VDE Sockets 0°, 16 A
 1 × USB-Charger Type A, 5V / 1A
 1 × Installation Space
 2× Double sided strips.
 Fixed supply cable 3.0 m with GST18 plug
 Dimensions (W × H × D):
 220 × 85 × 89 mm



Housing
 silver anodised

1593 8000 0100

EVoline Dock Square suitable for FUJITSU Port Replicator PR09

Aluminium housing.
 1× VDE Socket 0°, 16 A
 1× VDE Socket 60°, 16 A
 1 × cable outlet
 1 × on / off switch
 2 × Double sided strips for table mounting.
 Fixed mains cable 3 m with VDE angle plug
 Output cable 0.5 m with GST 18 socket



Housing
 silver anodised

1593 8100 0400

Dimensions (W × H × D):
 244 × 97,5 × 115 mm

K Configure your personal EVoline Dock Square in the EVoline Construction Set.
 See page 4-5 for instructions

Configurable Basic Housing EVoline Dock Square

Aluminium housing.
 2× Double sided strips.



Housing
 silver anodised

9332 0720 0000

black anodised

9332 0730 0000

white powder coated

9332 1170 0000

Double Sided Strips for EVoline Dock Square

2× Double sided strips



9332 1050 0000



EV0line®

Proven for office and hotel.

The EVoline Dock floats above the desktop and in this way provides for the maximum possible free space - either mobile on patented clamp feet or stationary on stainless steel clamps.

Internationally equipped with connections for power, data and multimedia.



Freely configurable according to your wishes

Available surfaces



Silver



Black



White



Stainless steel look

Various fasteners





Mounting clamp



Stainless steel clamp



Double mounting clamp

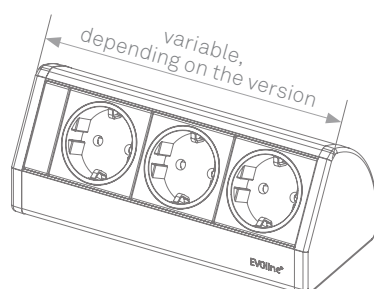


Examples of power supply options:

Fixed Power Supply Cable through the bottom of the profile


Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector

Color of the end caps painted to match the profiles color.

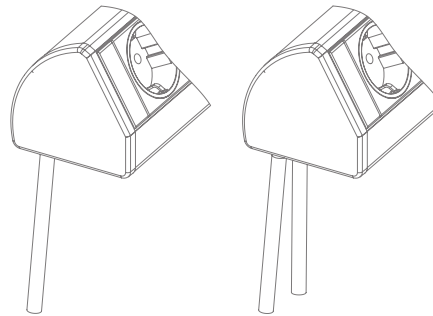

End cap with power input and/or output connector, depending on the surface thickness (max. 18 mm)


End cap colour: black

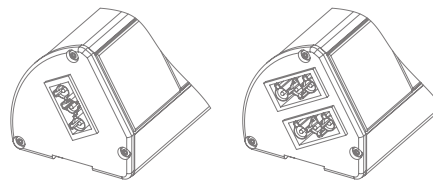

End cap with fixed power supply cable.

Available with several country specific plugs, EVoline Plug, wire end ferrules, Wieland GST 18 or WAGO WINSTA Connector.

Color of the end caps: black

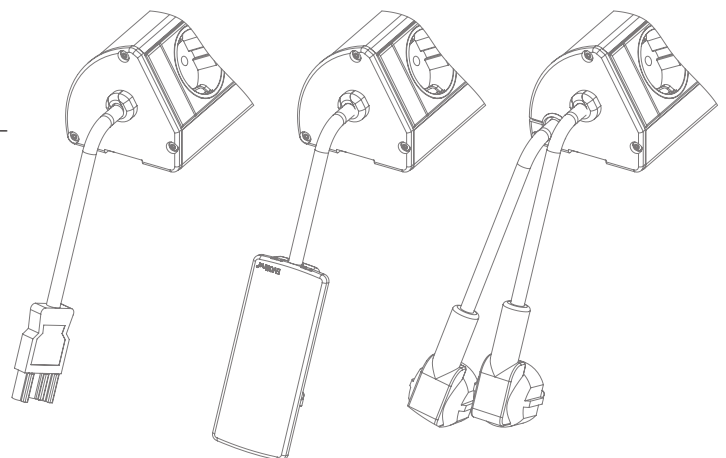

Description	Picture	Specifications	Order Number
<p>EVoline Dock CUISINE</p> <p>Aluminum housing, anodised in colour stainless steel (ALANOX®) End caps lacquered to match the frame color, supplied unattached. Outlet receptacles painted to match the color profile. 3× VDE sockets with 2.5 m supply cable with wire end ferrules. VDE plug supplied unattached. Mounting set for under desk installation attached.</p>		<p>Stainless steel anodised (ALANOX®)</p>	<p>1593 0368 3600</p>
<p>EVoline Dock DESK</p> <p>Aluminium housing, free positioning with provided slide stops. 3x sockets, VDE compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry in the left end cap.</p>		<p>Silver anodised</p>	<p>1593 0004 0300</p>
<p>EVoline Dock DESK DATA</p> <p>Aluminium housing, free positioning with provided slide stops. 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× Cat.6 modular couplings Power supply cable entry in the left end cap.</p>		<p>Silver anodised</p>	<p>1593 0047 8300</p>
<p></p>	<p></p>	<p>Black anodised</p>	<p>1593 0004 0100</p>
<p></p>	<p></p>	<p>White powder-coated</p>	<p>1593 0004 0700</p>
<p></p>	<p></p>	<p></p>	<p></p>
<p></p>	<p></p>	<p></p>	<p></p>
<p></p>	<p></p>	<p></p>	<p></p>

Description

Picture

Specifications

Order Number

EVoline Dock SMALL

Aluminium housing,
3× sockets, VDE compliant, 0°, 16 A,
contact-protected.
Fixed supply cable 3.0 m with angled
plug.
Power supply cable entry left side in
the bottom of the profile.



With 2 mounting clamps for surfaces thickness 8 - 40mm

Silver anodised 1593 0066 6300

Black anodised 1593 0066 6100

White powder-coated 1593 0066 6700

Without mounting clamps

Silver anodised 1593 0003 9300

Black anodised 1593 0003 9100

White powder-coated 1593 0003 9700

EVoline Dock DATA SMALL

Aluminium housing,
3× sockets, VDE-compliant, 0°, 16 A,
contact-protected.
Fixed supply cable 3.0 m with angled
plug.
2× modular couplings RJ45 to RJ45
Cat.6 shielded, 1:1 interconnected.
Power and data cable entry in the
bottom of the profile.



With 2 mounting clamps for surfaces thickness 8 - 40mm

Silver anodised 1593 0066 2300

Black anodised 1593 0066 2100

White powder-coated 1593 0066 2700



With QuickLock Pro 150 mm for surfaces thickness 18 - 32mm

Silver anodised 1593 0394 4300

Black anodised 1593 0394 4100

White powder-coated 1593 0394 4700

Without mounting clamps

Silver anodised 1593 0047 7300

Black anodised 1593 0047 7100

White powder-coated 1593 0047 7700

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

K Configure your individual EVoline Dock using the EVoline Modular System
 See page 4-5 for instructions

**Configurable Basic Housing
 EVoline Dock BLACK**

Aluminium housing
 Cable entry through end cap or profile.



Black anodised

9330 1811 0000

**Configurable Basic Housing
 EVoline Dock SILVER**

Aluminium housing
 Cable entry through end cap or profile.



Silver anodised

9330 1810 0000

**Configurable Basic Housing
 EVoline Dock STAINLESS**

Aluminium housing
 Cable entry through end cap or profile.



Stainless steel alike
 anodised (ALANOX®)

9330 8450 0000

**Configurable Basic Housing
 EVoline Dock WHITE**

Aluminium housing
 Cable entry through end cap or profile.



White powder-coated
 End caps plastic laquered
 to match
 (in case cable entry
 through the profile)

9331 3530 0000



**Variable. Combinable.
Comfortable.**

The EVoline R-Dock can be mounted at any 90-degree angle.

With its slightly angled front, it is easy to use.



*Freely configurable
according to your
wishes*

Back-to-back, it becomes a double unit on a free surface - and of course it's variably configurable in both types of use.

Available surfaces



Silver





Black



White




White /
white modules

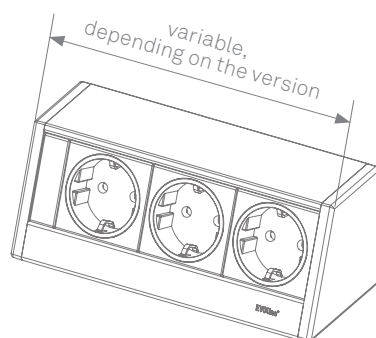


Examples of power supply options:

Fixed Power Supply Cable through the bottom of the profile

Available with several country specific plugs, with wire end ferrules, Wieland GST18i3, or WAGO WINSTA connector

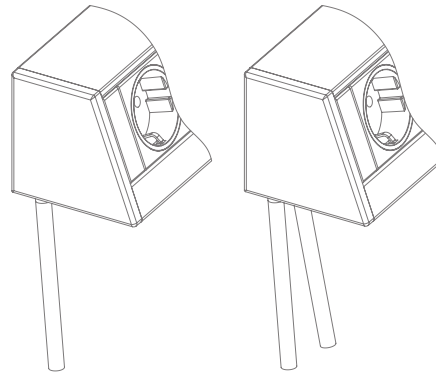


End cap with Wieland GST18i3, or WAGO WINSTA power input or output connector.

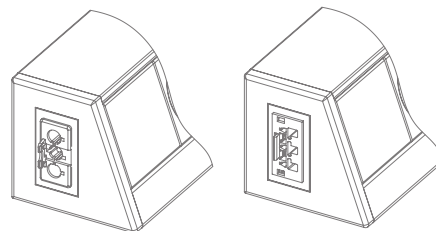



End cap with fixed power supply cable

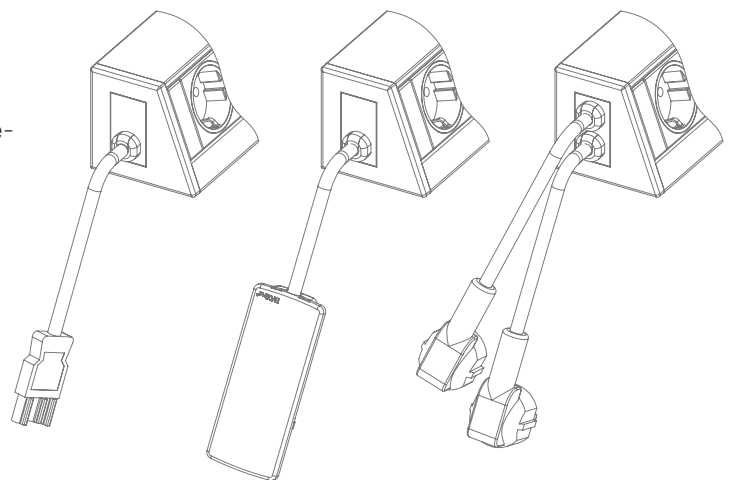Available with several country specific plugs, EVOLine Plug, wire end ferrules, Wieland GST18i3- or WAGO WINSTA Connector.



EVOLine® R-Dock

Description	Picture	Specifications	Order Number
<p>EVOLine R-Dock SMALL</p> <p>Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry on the left side in the bottom of the profile.</p>		Silver anodised	1598 0000 1700
		White powder-coated	1598 0000 8600
<p>EVOLine R-Dock DATA SMALL</p> <p>Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× Cat.6 modular couplings Power and data cable entry in the bottom of the profile.</p>		Silver anodised	1598 0000 1800
		White powder-coated	1598 0000 8700

Configure your individual EVOLine R-Dock using the EVOLine Modular System

See page 4-5 for instructions

Configurable Basic Housing EVOLine R-Dock

Aluminium housing.
Power supply cable entry through
end cap or profile.



Silver anodised

9331 0620 0000



Black anodised

9332 1980 0000



White powder-coated

9331 4340 0000

Technical changes and printing errors reserved. | Similar pictures.




EVOLine® T-Dock

At home in the kitchen.

The EVOLine T-Dock is raised above the work surface by its solid stainless steel pillar. This gives clutter free space and creates a safe distance between power supply and potentially wet surfaces in the kitchen.



The power supply cable is routed through the stainless steel pillar which is also a high quality anti-theft device since it is firmly screwed beneath the surface.

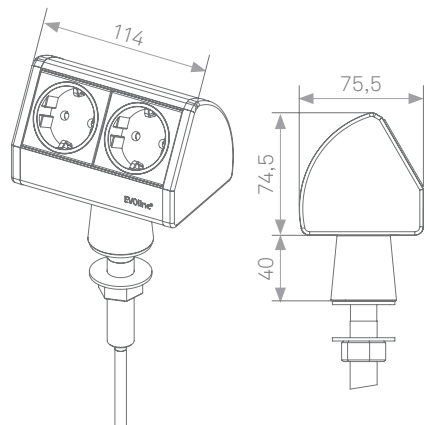

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

EVoline T-Dock

Aluminium housing in stainless steel optics, ALANOX®.
 For surface thickness up to 50 mm.
 2× sockets, VDE-compliant, 0°, 16 A, contact-protected.
 Fixed supply cable with ferrules, plug supplied unattached.
 Power supply cable entry through the stainless steel pillar.



Housing stainless steel alike anodised (ALANOX®)
 Plastic end caps lacquered in black

1593 0220 5600

Housing stainless steel alike anodised (ALANOX®)
 Plastic end caps lacquered in stainless steel optics, ALANOX®

1593 0345 5600

EVoline T-Dock with USB Charger

1× socket, VDE-compliant, 0°, 16 A, contact-protected.
 1x USB-Charger Type A, 5 V / 1 A
 Fixed supply cable with ferrules, plug supplied unattached.
 Power supply cable entry through the stainless steel pillar.



Housing stainless steel alike anodised (ALANOX®)
 Plastic end caps lacquered in black

1593 0387 4600

Housing stainless steel alike anodised (ALANOX®)
 Plastic end caps lacquered in stainless steel optics, ALANOX®

1593 0387 5600



EVOLine®

KAEG

7:58

Fits in every corner.

The V-Dock can be mounted horizontally or vertically and is variable in length.

A further advantage: the connection cable is invisibly guided behind the profile in the angle. The V-Dock's 45-degree orientation in the room makes it easy to connect power and data cables.



*Freely configurable
according to your
wishes*


Available surfaces



Silver




Black

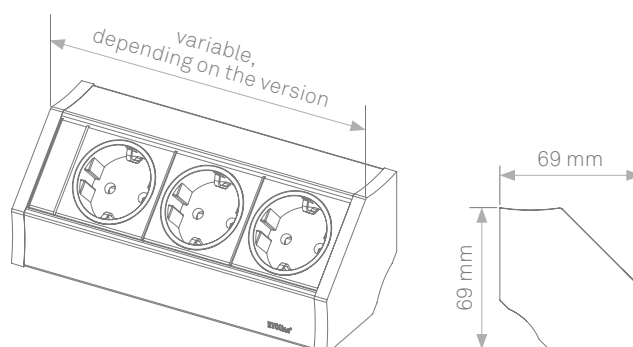

Examples of power supply options:


End cap with power input and/or output connector.

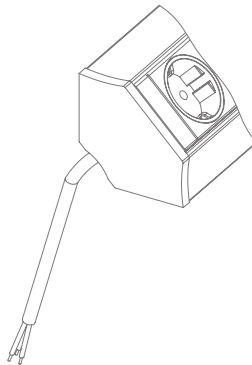



End cap with fixed power supply cable.

Available with several country specific plugs, EVOLine Plug, wire end ferrules, Wieland GST 18i3- or WAGO WINSTA Connector.

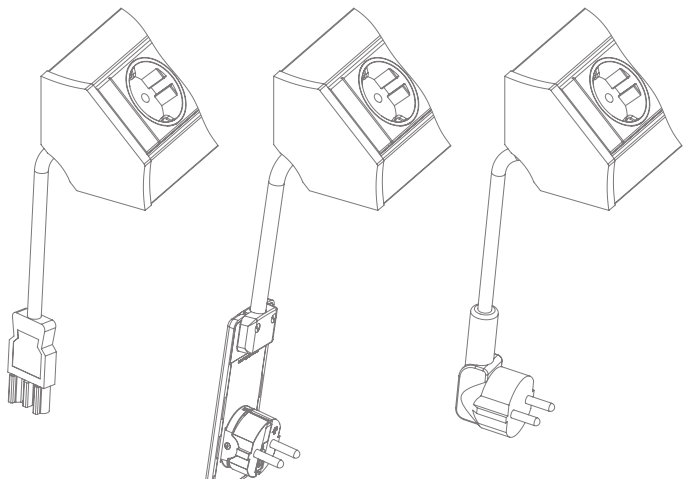End cap colour: black



Description	Picture	Specifications	Order Number
<p>EVoline V-Dock CUISINE</p> <p>Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 2.5 m with fer- rules, plug supplied unattached. Incl. profile bracket 100 mm.</p>		Silver anodised	1593 6000 1300
<p>EVoline V-Dock DATA SMALL</p> <p>Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. 2× modular couplings RJ45 to RJ45 Cat.6 shielded, 1:1 interconnected. Fixed supply cable 3 m with angled plug. Incl. 2 profile brackets 100 mm.</p>		Silver anodised	1593 6000 2300

Configure your individual EVoline V-Dock using the EVoline Modular System

See page 4-5 for instructions

Configurable Basic Housing EVoline V-Dock

Aluminium housing
From a length of 250 mm,
2 profile brackets of 100 mm are
required for fixing.



Silver anodised

9330 5600 0000

Configurable Basic Housing EVoline V-Dock

Aluminium housing
From a length of 250 mm,
2 profile brackets of 100 mm are
required for fixing.



Black anodised

9331 5850 0000



EVOLine® U-Dock

Professional. Robust. Safe.
For hospitals, laboratories etc.

The aluminium profile of the EVOLine U-Dock can be attached to, below or in front of the worktop in a variety of ways.

As a robust basis for a professional power and data supply, it includes freely configurable power and data connections as well as safety modules for the protection of


employees and machines. The electrically isolated interchangeable modules can be exchanged at any time.





A large number of power connection modules are available for the supply of power.

End cap with fixed power cable, available in different country versions.


Available with wire end ferrules, EVOLine plug or power plug.



WAGO WINSTA



GST 18



Freely configurable according to your wishes

Available surfaces




Silver




Black

Optional end cap with mounting bracket

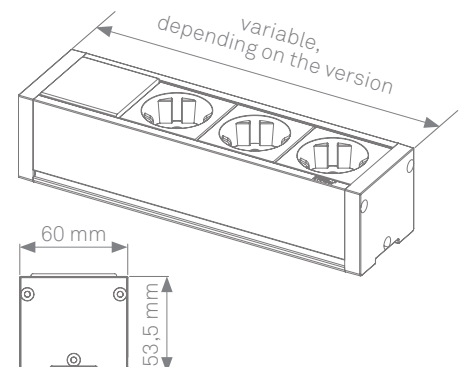

Examples of power supply options:


End cap with Wieland GST 18i3, or WAGO WINSTA power input or output connector.

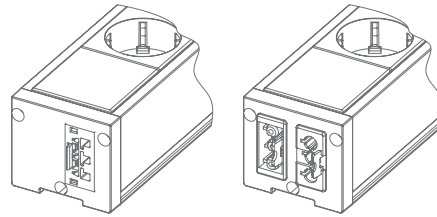


End cap with fixed power supply cable.

Available with several country specific plugs, EVOLine Plug, wire end ferrules, Wieland GST 18i3- or WAGO WINSTA Connector.

End cap colour: black

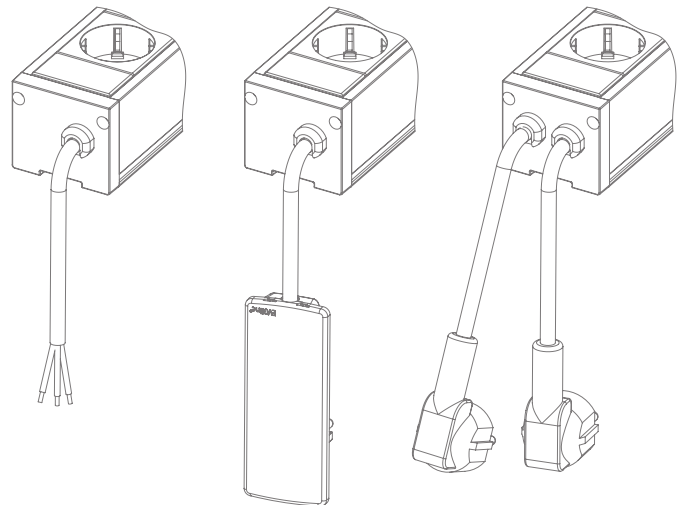

All above mentioned U-Dock end caps are available with or without mounting angles.

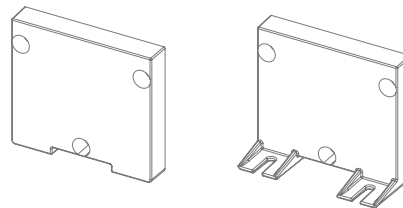

EVOLine® U-Dock

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

EVOLine U-Dock SMALL

Aluminium housing,
3× sockets, VDE-compliant,
60°, 16 A, contact-protected.
Power input and output connector
GST18i3 plug and GST18i3 socket.



Silver anodised
with mounting angles

1596 0000 9500

Silver anodised
without mounting angles

1596 0000 9600

EVOLine U-Dock DATA SMALL

Aluminium housing,
3× sockets, VDE-compliant,
60°, 16 A, contact-protected. Power
input and output connector GST18i3
plug and GST18i3 socket.
2× modular couplings RJ45 to RJ45
Cat.6 shielded, 1:1 interconnected.
Entry for data cables in the opposite
end cap.



Silver anodised
with mounting angles

1596 0000 5900

Silver anodised
without mounting angles

1596 0000 3300

Configure your individual EVOLine U-Dock using the EVOLine Modular System

See page 4-5 for instructions

Configurable Basic Housing EVOLine U-Dock

Aluminium housing
End caps optionally with or without
mounting angles



Silver anodised

9330 8510 0000

Black anodised

9332 4770 0000



The mobile organiser.

It organises the most important connections and bundles them, easily accessible, right next to where they are needed.

The vertical multiple socket can be ordered with USB chargers in different versions and international power socket modules.

Available surfaces


Black, silver or white.




Available with internationally approved sockets.

The EVoline Up can be attached quickly and securely to any work surface - even to glass - with the aid of adhesive strips and removed again without leaving residues behind.

Of course, it can also be firmly screwed to the surface if desired.

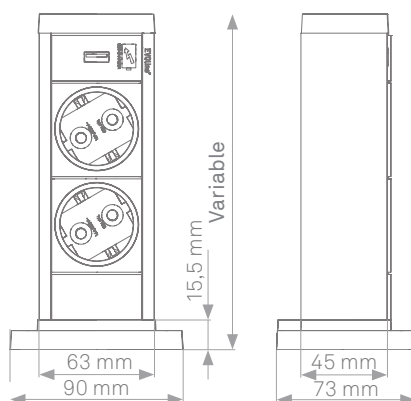

Description	Picture	Specifications	Order Number
<p>EVoline Up</p> <p>Aluminium housing silver anodized 2 × VDE Sockets 60°, 16 A 1 × USB-Charger Type A, 5 V / 1 A 2x Adhesive tapes Fixed supply cable 3.0 m Angled plug Dimensions (W × H × D): 90 × 75 × 180 mm</p>		<p>Housing</p> <p>silver anodised black anodised white powder coated</p>	<p>1593 9000 0900 1593 9000 2700 1593 9000 2900</p>

K Configure your individual EVoline Up using the EVoline Modular System
 See page 4-5 for instructions

**Configurable Basic Housing
 EVoline Up**

Aluminium housing
 2x Adhesive tapes

Note: Max. configuration: 3 ½ modules




Housing	
Silver anodised	9332 2690 0000
black anodised	9332 2680 0000
white powder coated	9332 2700 0000



Stable. Space-saving.

The EVOLine Vertical stands freely in the room, stable on a solid cast iron base. Upright, mobile and space-saving, it is the ideal solution for offices, hotels or salesrooms.

With a height of up to 1.20 m, the EVOLine Vertical eliminates the need to bend down for sockets: power, multimedia and data connections are easily accessible at a comfortable height.

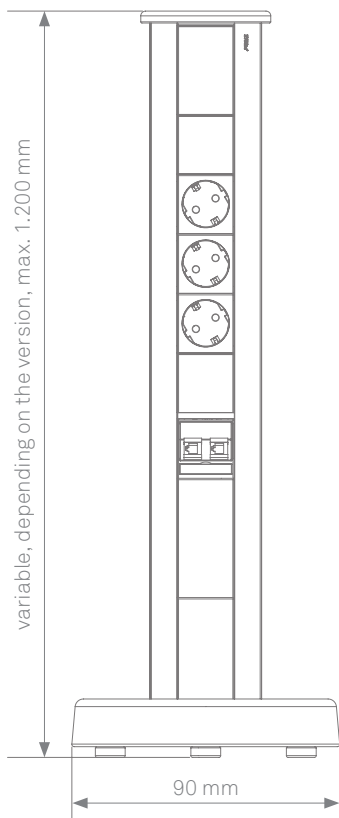

*Freely configurable
according to your
wishes*

Available surfaces




Silver



Black

EVoline® Vertical

Description	Picture	Specifications	Order Number
<p>EVoline Vertical Standard</p> <p>Aluminium housing, Cover made of aluminium, black powder-coated. Base made of solid cast iron, black powder-coated. 3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable, 3.0 m with angled plug. 2× data sockets RJ 45 CAT 6 shielded each 3.0 m cable and plug.</p> <p>Dimensions Base: Diameter ø 24,5 cm Height: 4 cm Profile Height: 600 mm.</p>		<p>Silver anodised</p> <p>Black anodised</p>	<p>1593 4300 1100</p> <p>1593 4300 5000</p>

Configure your individual EVoline Vertical using the EVoline Modular System

See page 6-7 for instructions

Configurable Basic Housing EVoline Vertical

Aluminium housing, free standing, base made of solid cast iron, black powder-coated. Cover made of aluminium, black powder-coated.

Dimensions Base:
Diameter ø 24,5 cm
Height: 4 cm



Silver anodised	9330 8560 0000
Black anodised	9330 8570 0000
Profile height 600 mm max. profile height 1200 mm	
Profile extension > 600 mm per 50 mm	9330 0130 0000



Safety right from the start.

EVoline relies for office electrification on a modular power supply with decentralised safety modules.



Available with internationally approved sockets.

The EVoline Express isolates sensitive circuits from each other and ensures operational safety.

Possible plug connector systems




Wieland GST 18i3 plug



Wieland GST 18i3 socket




WAGO WINSTA plug



WAGO WINSTA socket



Connection options with the Express:

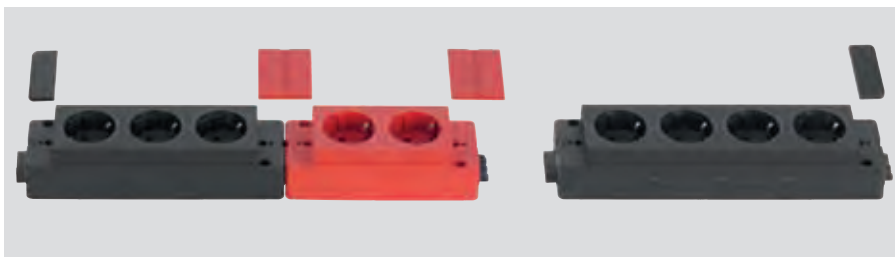

Self-extinguishing and flame-retardant plastics are standard.


Available colours






Black



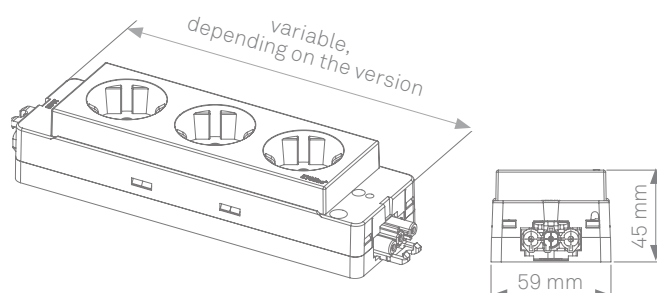





Red








Description	Picture	Specifications	Order Number
EVoline Express lateral cover cap for screw holes (not suitable for Express Type 900 and 907)		Housing Colour black	1591 1830 0400
		Housing Colour red	1591 1830 0500
		Housing Colour green	1591 1830 0700
EVoline Express Type 910 2 gang Power Bar, VDE for plug types: F, E+F, C rated voltage: 250 V / 50 Hz rated current: 16 A halogen-free Dimensions : 46 × 59 × 148 mm		Wieland GST 18	
		without contact protection	
		Housing Colour black	1591 0200 0100
		Housing Colour red	1591 0200 0120
		contact protected	
		Housing Colour black	1591 0200 0110
		Housing Colour red	1591 0200 0130
		WAGO WINSTA MIDI	
		without contact protection	
		Housing Colour black	1591 0200 0200
Housing Colour red	1591 0200 0220		
contact protected			
Housing Colour black	1591 0200 0210		
Housing Colour red	1591 0200 0230		
EVoline Express Type 910 3 gang Power Bar, VDE for plug types: F, E+F, C rated voltage: 250 V / 50 Hz rated current: 16 A halogen-free Dimensions : 46 × 59 × 198 mm		Wieland GST 18	
		without contact protection	
		Housing Colour black	1591 0300 0100
		Housing Colour red	1591 0300 0120
		contact protected	
		Housing Colour black	1591 0300 0110
		Housing Colour red	1591 0300 0130
		WAGO WINSTA MIDI	
		without contact protection	
		Housing Colour black	1591 0300 0200
Housing Colour red	1591 0300 0220		
contact protected			
Housing Colour black	1591 0300 0210		
Housing Colour red	1591 0300 0230		






Description	Picture	Specifications	Order Number
<p>EVoline Express Type 910 4-fach Power Bar, VDE</p>		<p>Wieland GST 18</p>	
<p>for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A halogen-free</p>		<p>without contact protection</p>	
<p>Dimensions : 46 × 59 × 248 mm</p>		<p>Housing Colour black</p>	<p>1591 0400 0100</p>
		<p>Housing Colour red</p>	<p>1591 0400 0120</p>
		<p>contact protected</p>	
		<p>Housing Colour black</p>	<p>1591 0400 0110</p>
		<p>Housing Colour red</p>	<p>1591 0400 0130</p>
		<p>WAGO WINSTA MIDI</p>	
		<p>without contact protection</p>	
		<p>Housing Colour black</p>	<p>1591 0400 0200</p>
	<p>Housing Colour red</p>	<p>1591 0400 0220</p>	
	<p>contact protected</p>		
	<p>Housing Colour black</p>	<p>1591 0400 0210</p>	
	<p>Housing Colour red</p>	<p>1591 0400 0230</p>	


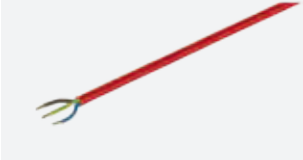










Description	Picture	Specifications	Order Number
<p>EVoline Express Type 910 2 gang Power Bar, BE/FR</p> <p>for plug types: F, E+F, C rated voltage: 250 V / 50 Hz rated current: 16 A halogen-free</p> <p>Dimensions : 46 × 59 × 148 mm</p>		<p>Wieland GST 18</p> <p>without contact protection Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection Housing Colour black Housing Colour red</p>	<p>1591 0201 0100 1591 0201 0120 1591 0201 0200 1591 0201 0220</p>
<p>EVoline Express Type 910 3 gang Power Bar, BE/FR</p> <p>Rated voltage: 250V / 50 Hz Rated current: 16 A halogen-free</p> <p>Dimensions : 46 × 59 × 198 mm</p>		<p>Wieland GST 18</p> <p>without contact protection Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection Housing Colour black Housing Colour red</p>	<p>1591 0301 0100 1591 0301 0120 1591 0301 0200 1591 0301 0220</p>
<p>EVoline Express Type 910 4-fach Power Bar, BE/FR</p> <p>Rated voltage: 250V / 50 Hz Rated current: 16 A halogen-free</p> <p>Dimensions : 46 × 59 × 248 mm</p>		<p>Wieland GST 18</p> <p>without contact protection Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection Housing Colour black Housing Colour red</p>	<p>1591 0401 0100 1591 0401 0120 1591 0401 0200 1591 0401 0220</p>

Description	Picture	Specifications	Order Number
<p>EVoline Express Type 910 2 gang Power Bar, CH</p>		<p>Wieland GST 18 without contact protection</p>	<p>1591 0203 0100 1591 0203 0120</p>
<p>Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free</p>		<p>WAGO WINSTA MIDI without contact protection</p>	<p>1591 0203 0200 1591 0203 0220</p>
<p>Dimensions : 46 × 59 × 148 mm</p>			
<p>EVoline Express Type 910 3 gang Power Bar, CH</p>		<p>Wieland GST 18 without contact protection</p>	<p>1591 0303 0100 1591 0303 0120</p>
<p>Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free</p>		<p>WAGO WINSTA MIDI without contact protection</p>	<p>1591 0303 0200 1591 0303 0220</p>
<p>Dimensions : 46 × 59 × 198 mm</p>			
<p>EVoline Express Type 910 4 gang Power Bar, CH</p>		<p>Wieland GST 18 without contact protection</p>	<p>1591 0403 0100 1591 0403 0120</p>
<p>Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free</p>		<p>WAGO WINSTA MIDI without contact protection</p>	<p>1591 0403 0200 1591 0403 0220</p>
<p>Dimensions : 46 × 59 × 248 mm</p>			

Description	Picture	Specifications	Order Number
<p>EVoline Express Typ 910 2 gang Power Bar, GB</p> <p>Rated voltage: 250 V / 50 Hz halogen-free</p> <p>Dimensions: 46 × 59 × 148 mm</p>		<p>Wieland GST 18</p> <p>with contact protection Housing Colour black Rated current: 13 A</p> <p>with contact protection Housing Colour black Single fuse: 3,15 A</p> <p>with contact protection Housing Colour black Single fuse: 5 A</p>	<p>1591 0206 0110</p> <p>1591 0207 0110</p> <p>1591 0208 0110</p>
<p>EVoline Express Typ 910 3 gang Power Bar, GB</p> <p>Rated voltage: 250 V / 50 Hz halogen-free</p> <p>Dimensions: 46 × 59 × 198 mm</p>		<p>Wieland GST 18</p> <p>with contact protection Housing Colour black Rated current: 13 A</p> <p>with contact protection Housing Colour black Single fuse: 3,15 A</p> <p>with contact protection Housing Colour black Single fuse: 5 A</p>	<p>1591 0306 0110</p> <p>1591 0307 0110</p> <p>1591 0308 0110</p>
<p>EVoline Express Typ 910 4 gang Power Bar, GB</p> <p>Rated voltage: 250 V / 50 Hz halogen-free</p> <p>Dimensions: 46 × 59 × 248 mm</p>		<p>Wieland GST 18</p> <p>with contact protection Housing Colour black Rated current: 13 A</p> <p>with contact protection Housing Colour black Single fuse: 3,15 A</p> <p>with contact protection Housing Colour black Single fuse: 5 A</p>	<p>1591 0406 0110</p> <p>1591 0407 0110</p> <p>1591 0408 0110</p>





Description	Picture	Specifications	Order Number
<p>EVoline Express Type 901 3 gang Power Bar</p> <p>Rated voltage: 250V / 50 Hz Rated current: 16 A halogen-free</p> <p>Dimensions : 39 x 59 x 186 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p>	<p>1590 1100 1500 1590 1100 1600</p>
<p>EVoline Express Interference Filter</p> <p>2-pin with plug and socket</p> <p>Dimensions : 39 x 59 x 188 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 0112 7500 1592 0112 7600</p> <p>1592 0112 7700 1592 0112 7800</p>

Description	Picture	Specifications	Order Number
<p>EVoline Express Power Cord</p> <p>Germany, Austria, France with Angled plug and socket connector Colour: black</p>		<p>GST 18 (Connector)</p> <p>Cable length 3 m Cable length 4 m Cable length 5 m</p> <p>WAGO WINSTA (Connector)</p> <p>Cable length 3 m Cable length 4 m Cable length 5 m</p>	<p>6590 0603 0500 6590 0604 0500 6590 0605 0500</p> <p>6590 0903 0100 6590 0904 0100 6590 0905 0100</p>
<p>EVoline Express Power Cord</p> <p>Germany, Austria, France with Angled plug and socket connector Colour: red</p>		<p>GST 18 (Connector)</p> <p>Cable length 3 m</p> <p>WAGO WINSTA (Connector)</p> <p>Cable length 3 m Special lengths from 100 pieces on request</p>	<p>1590 0603 0600</p> <p>1590 0903 0200</p>
<p>EVoline Express Power Cord</p> <p>Great Britain, 13 A with Angled plug and socket connector Colour: black</p>		<p>GST 18 (Connector)</p> <p>Cable length 3 m</p>	<p>6591 1603 0500</p>
<p>EVoline Express Power Cord</p> <p>Switzerland with safety plug and socket connector</p>		<p>GST 18 (Connector)</p> <p>Cable length 3 m, 10 A Cable length 3 m, 16 A</p> <p>WAGO WINSTA (Connector)</p> <p>Cable length 3 m, 10 A</p>	<p>1590 0623 0500 1590 0663 0500</p> <p>1590 0923 0100</p>
<p>EVoline Express Power Supply Module with Overload Circuit Breaker</p> <p>Plug type J (T12) Power Supply Module with resettable overload switch 10 A 3× 1,5 mm² i.e. Switzerland</p>		<p>GST 18 (Connector)</p> <p>Cable length 3 m</p>	<p>1599 0911 7200</p>

Description	Picture	Specifications	Order Number
EVoline Express Connecting cable			
Freely configurable cable, Plug and socket.		Cable: Cable 3 x 1,5 mm ² , black Length 1 m (Minimum 0,2 m) Cable extension per m (purchase from 0.1 m)	9331 7920 0000
		Cable: Cable 3 x 1,5 mm ² , red Length 1 m (Minimum 0,2 m) Cable extension per m (purchase from 0.1 m)	9331 7930 0000
		Plug: Plug GST18	9331 7940 0000
		Plug: Plug WAGO WINSTA MIDI	9331 7950 0000
		Plug: Plug Neutrik powerCON	9332 4260 0000
		Connector: Connector GST18	9331 7960 0000
		Connector: Connector WAGO WINSTA MIDI	9331 7970 0000
		Connector: Connector Neutrik powerCON	9332 4270 0000
EVoline Express Socket Connector			
Severally, without cable.		Plug: Plug GST18	1599 0907 7000
		Plug: Plug WAGO WINSTA MIDI	1599 0910 9500
		Connector: Connector GST18	1599 0905 9000
		Connector: Connector WAGO WINSTA MIDI	1599 0910 9600

Description	Picture	Specifications	Order Number
<p>Distributor Wieland GST18</p> <p>250 V, 20 A Input: Plug 3-pole</p>		<p>2x Output: Connector 3-pole Flat Shape with Lock without Mounting clip</p>	6599 0906 8300
		<p>2x Output: Connector 3-pole T-Shape with Lock without Mounting clip</p>	6599 0905 2200
		<p>2x Output: Connector 3-pole h-Shape with Lock without Mounting clip Plug directly into Express sockets</p>	6599 0911 3000
		<p>3x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7000
		<p>5x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7100
<p>Y-Cable Distributor Wieland GST18</p> <p>1x Input, Plug 3-pole, GST18</p>		<p>2x Output, Connector 3-pole, GST18 with Lock without Mounting clip Lenght: 300 mm</p>	6599 0906 6600

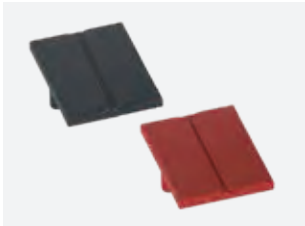Description	Picture	Specifications	Order Number
<p>Distributor WAGO WINSTA</p> <p>250 V, 25 A Input: Plug 3-pole</p>		<p>2x Output: Connector 3-pole T-Shape with Lock without Mounting clip</p>	6599 0906 9100
		<p>2x Output: Connector 3-pole h-Shape with Lock with Mounting plate</p>	1599 0911 7600
		<p>3x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7300
		<p>5x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7400
<p>EVoline Rail</p> <p>For under desk installation, for the EVoline Express range. Black plastic brackets. Black aluminium profiles</p>		<p>2 black plastic brackets with 2 aluminium profiles</p> <p>Profile length 165 mm (for 3 gang)</p> <p>Profile length 215 mm (for 4 gang)</p>	1593 5400 0300
		<p>Individual</p> <p>1 black plastic brackets for EVoline Express</p>	9331 6230 0000
		<p>1 pair of Aluminium profiles per 100 mm</p>	9331 6210 0000

Description	Picture	Specifications	Order Number
<p>EVOLine Express Module Connector</p> <p>for a safe connection of plugged EVOLine modules (for Express 901/910)</p>		<p>black</p> <p>red</p>	<p>1591 1830 0100</p> <p>1591 1830 0200</p>
<p>EVOLine Interlock GST18</p> <p>two parts, can be released by hand without tools, for flying socket-plug connections between two cables, must not be used for fixed installations.</p>		<p>black</p>	<p>1599 0911 7700</p>
<p>EVOLine Express GST18 latches</p> <p>Free cable connections snap-on for jacks or suitable plugs. According to approvals a locking must be provided.</p>		<p>black</p>	<p>1599 0909 6700</p>
<p>EVOLine Express Closure Cap for GST18</p> <p>To cover unassigned connectors</p>		<p>black</p>	<p>1599 0901 9400</p>




EVOLine[®] Qi Charger


Under cover.

All Qi-compatible devices can be charged with the EVOLine Qi Charger.

It is installed either under the table or worktop - so that the charging station is invisible - or as an insert for standard openings of \varnothing 80 mm.

The device to be charged is simply placed in the appropriate place - pure minimalism.



Description	Picture	Specifications	Order Number
<p>EVoline Qi Charger</p> <p>Wireless charger according WPC standard Spec. 1.2.2 "Qi". The coil is mounted below the work surface or is mounted into an opening Ø 80 mm.</p> <p>Operating voltage 9 V Charging capacity max. 10 W</p> <p>Mains adapter: 1 m USB connection cable</p>		<p>USB power supply with Euro plug</p> <p>USB power supply with universal connector set (US, EU, AU/CN, UK)</p>	<p>1599 0911 2800</p> <p>1599 0912 3800</p>

Wireless charging


resonant inductive coupling between transmitter (charging station) and receiver (mobile phone)

vendor independent,
charges any Qi compatible device

transmitter coil is active only when a connection to the receiving device is made



reddot design award
winner 2011



Ausgezeichnet mit dem 1. Preis
Universal Home: Product Design
Designpreis des Landes
Nordrhein-Westfalen



Designpreis
Deutschland
2011
NOMINIERT



Ausgezeichnet with der
IENA Goldmedaille



EVoline® Plug / PlugFix

Extremely flat.
Fits behind every cupboard.
Prevents tripping hazards.

The extra-flat EVoline Plug easily fits behind every piece of furniture. Its intelligent hinge mechanism turns the grip into a lever - this way the plug can be removed from the socket without the use of force. Even if the cable is jerked, the plug is released without damage.

The EVoline Plug has won numerous awards for its smart ergonomics and minimalist design.




Plug

Mobile plug mating face for easy operation and prevention of tripping hazards




PlugFix

With installed cable and coupling or multiple socket.



EVoline® Plug













EVoline® PlugFix




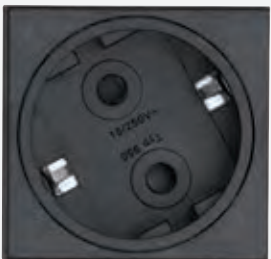

EVOLine® Plug | PlugFix

Description	Picture	Specifications	Order Number
<p>EVOLine Plug</p> <p>Screwable ultra-low profile grounded plug with movable face, for wire diameters of 0.75 mm² to 1.5 mm², 250 V / 16 A</p>		<p>black</p> <p>white</p>	<p>1510 0000 0100</p> <p>1510 0000 0300</p>
<p>EVOLine PlugFix</p> <p>Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm² connected to 3 gang power bar EVOLine Express, 250 V / 16 A</p>		<p>black, with 1.5 m Cable</p> <p>white, with 1.5 m Cable</p>	<p>1510 0015 6100</p> <p>1510 0015 6300</p>
<p>EVOLine PlugFix</p> <p>Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm² connected to socket coupling with contact protection, 250 V / 16 A</p>		<p>black, with 3 m Cable</p> <p>black, with 1.5 m Cable</p> <p>white, with 3 m Cable</p> <p>white, with 1.5 m Cable</p>	<p>1510 0030 5100</p> <p>1510 0015 5100</p> <p>1510 0030 5300</p> <p>1510 0015 5300</p>
<p>EVOLine PlugFix</p> <p>Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm² and connector. Select from Wieland GST18 or WAGO WINSTA sockets.</p>		<p>GST 18i3 black 1.5 m Cable and socket</p> <p>WAGO WINSTA black 1.5 m Cable and socket</p>	<p>1510 0015 2100</p> <p>1510 0015 8100</p>
<p>EVOLine PlugFix</p> <p>Ultra-low profile grounded plug with movable face, with Fix</p>		<p>black, with 1.5 m Cable</p> <p>white, with 1.5 m Cable</p>	<p>1510 0015 1100</p> <p>1510 0015 1300</p>

The chart below gives an overview about country specific socket versions. Deviations may occur.






Socket VDE (CEE 7/3) 230 V, 16 A		Plug Type F, E+F, C	Algeria, Andorra, Armenia, Austria, Bosnia and Herzegovina, Bulgaria, Estonia, Finland, Georgia, Germany, Hungary, Iceland, Latvia, Lithuania, Luxembourg, Macedonia, Moldova, Montenegro, Netherlands, Norway, Portugal, Romania, Russia, Serbia, South Korea, Spain, Ukraine
Socket (CEE 7/5) 230 V, 16 A		Plug Type E, E+F, C	France, Belgium, Cameroon, Czech Republic, Mali, Morocco, Poland, Slovakia, Tunisia
Socket (BS 1363) 230 V, 3,15 A oder 5 A		Plug Type G	Great Britain, Bahrain, Cyprus, Hong Kong, Indonesia, Ireland, Kenya, Kuwait, Malaysia, Malta, Mauritius, Nigeria, Oman, Qatar, Saudi Arabia, Singapore, United Arab Emirates, Zimbabwe
Socket (SEV 1011) 230 V, 10 A, T13		Plug Type J, C	Switzerland, Liechtenstein
Socket (SEV 1011) 230 V, 16 A, T23		Plug Type J, C	Switzerland, Liechtenstein
Socket (DS 608842-D1) 230 V, 13 A		Plug Type K, C	Denmark, Greenland
Socket (DS 608842-D1) 230 V, 13 A, EDV		Plug Type K EDV	Denmark, Greenland
Socket (CEI 23-16-VII) 230 V, 16 A oder 10 A		Plug Type L, C	Italy, Chile, Cuba
Socket (AS 3112) 230 V, 10 A		Plug Type I	Australia, New Zealand, Papua New Guinea, several Pacific Islands
Socket (NEMA 5-15) 120 V, 15 A		Plug Type B	USA, Canada, Cuba, Ecuador, Jamaica, Japan, Mexico, Paraguay, Peru, Philippines, Taiwan, Venezuela, various Caribbean Islands

* Power modules are only available completely assembled in EVOLine products.






Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FlipTop</i> <i>/ FlipPush</i> <i>/ FrameDock</i> <i>/ One</i> <i>/ Port</i> <i>/ PortPush</i> <i>/ U- & V-Dock</i> <i>/ Up</i>																								
Socket 0°, 16 A Contact-protected, VDE for plug type: F, C, E+F Installation dimensions: 50 x 50 mm		9330 0090 0000 black 9330 0200 0000 red 9330 5450 0000 white 9330 5480 0000 light grey	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
Socket 0°, 16 A without Contact-protection, VDE for plug type: F, C, E+F Installation dimensions: 50 x 50 mmv		9330 6190 0000 black 9330 6220 0000 red	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•												
•	•	•	•	•	•																						
•	•	•	•	•	•																						
Socket 0°, 16 A Contact-protected, VDE for plug type: F, C, E+F Installation dimensions: 50 x 50 mm		9330 8130 0000 black socket, plastic frame lacquered in stainless steel optics (ALANOX®)	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•																		
•	•	•	•	•	•																						
Socket 60°, 16 A Contact-protected, VDE for plug type: F, C, E+F Installation dimensions: 50 x 50 mm		9330 1050 0000 black 9330 1430 0000 red 9330 5460 0000 white 9330 5490 0000 light grey	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
Socket 60°, 16 A without Contact-protection, VDE for plug type: F, C, E+F Installation dimensions: 50 x 50 mm		9330 6200 0000 black 9330 6230 0000 red	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•												
•	•	•	•	•	•																						
•	•	•	•	•	•																						

Technical changes and printing errors reserved. | Similar pictures. Power modules are only available completely assembled in EVOLine products.

Dock / R-Dock
 Dock Square
 FlipTop Push
 FlameDock
 One Port
 Port Push
 U- & V-Dock
 Up

Description	Picture	Order Nr. & Specifications								
<p>Socket 90°, 16 A Contact-protected, VDE</p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1260 0000 black</p>	●	●	●	●	●			
		<p>9330 1500 0000 red</p>	●	●	●	●	●			
<p>Socket 90°, 16 A without Contact-protection, VDE</p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 6210 0000 black</p>	●	●	●	●	●			
		<p>9330 6240 0000 red</p>	●	●	●	●	●			
<p>Socket 0°, 16 A Contact-protected, FR/BE/PL</p> <p>France, Belgium, Poland for plug type: E, C, E+F</p> <p>Installation dimensions: 50 x 50 mm,</p>		<p>9330 0250 0000 black</p>	●	●	●	●	●	●		
		<p>9331 1810 0000 white</p>	●	●	●	●	●	●		
<p>Socket 60°, 16 A Contact-protected, FR/BE/PL</p> <p>France, Belgium, Poland for plug type: E, C, E+F</p> <p>Installation dimensions: 50 x 50 mm,</p>		<p>9330 1060 0000 black</p>	●	●	●	●	●	●	●	
		<p>9332 1650 0000 white</p>	●	●	●	●	●	●	●	
<p>Socket 0°, 10 A / 16 A Contact-protected, IT</p> <p>Italy for plug type: L, C</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 3180 0000</p>	●	●	●	●	●	●	●	

Technical changes and printing errors reserved. | Similar pictures.
 Power modules are only available completely assembled in EVoline products.

Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FlipTopPush</i> <i>/ FrameDock</i> <i>/ One</i> <i>/ Port</i> <i>/ PortPush</i> <i>/ U- & V-Dock</i> <i>/ Up</i>
Socket 0°, 10 A without Contact-protection, CH		9330 1100 0000 black	● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1480 0000 red	● ● ● ● ● ●
Installation dimensions: 50 x 50 mm		9331 9920 0000 white	● ● ● ● ● ●
Socket 0°, 16 A without Contact-protection, CH		9330 1010 0000 black	● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1710 0000 red	● ● ● ● ● ●
Installation dimensions: 50 x 50 mm		9332 1210 0000 white	● ● ● ● ● ●
Socket 60°, 10 A without Contact-protection, CH		9330 1110 0000 black	● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1490 0000 red	● ● ● ● ● ●
Installation dimensions: 50 x 50 mm			
Socket 60°, 16 A without Contact-protection, CH		9330 1070 0000 black	● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1450 0000 red	● ● ● ● ● ●
Installation dimensions: 50 x 50 mm			
Socket 270°, 10 A without Contact-protection, CH		9330 1280 0000 black	● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1550 0000 red	● ● ● ● ● ●
Installation dimensions: 50 x 50 mm			

Description

Picture

Order Nr. & Specifications

**Socket 270°, 16 A
without Contact-protection, CH**

Switzerland
for plug type: J, C

Installation dimensions: 50 x 50 mm



9330 1290 0000
black

9330 1520 0000
red

●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●

**Socket 0°, 13 A
Contact-protected, DK**

Denmark, Standard
for plug type: K, C

Installation dimensions: 50 x 50 mm



9330 1020 0000
black

9332 1230 0000
white

**Socket 0°, 13 A
Contact-protected, DK**

Denmark, EDV-coded
for plug type: K

Installation dimensions: 50 x 50 mm



9330 1030 0000
black

9330 1730 0000
red

**Socket 60°, 13 A
Contact-protected, DK**

Denmark, Standard
for plug type: K, C

Installation dimensions: 50 x 50 mm



9330 1080 0000
black

**Socket 240°, 13 A
Contact-protected, DK**





Denmark, Standard
for plug type: K, C





Installation dimensions: 50 x 50 mm


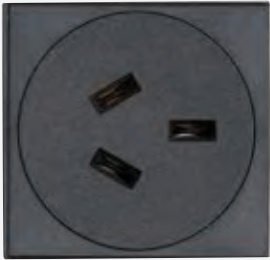



9330 7190 0000
black

Technical changes and printing errors reserved. | Similar pictures.
Power modules are only available completely assembled in EVoline products.

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /																																								
<p>Socket 0°, 13 A Contact-protected, GB</p> <p>Great Britain without fuse, for plug type: G</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9332 0530 0000 black</p> <p>9332 2220 0000 white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td></td><td>•</td><td>•</td><td></td><td></td><td></td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•		•	•				•	•																				
•	•	•	•	•	•	•	•	•	•																																		
•	•		•	•				•	•																																		
<p>Socket 0° Contact-protected, GB</p> <p>Great Britain with integrated fuse for plug type: G</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9332 0560 0000 black; 3,15 A</p> <p>9332 2250 0000 white; 3,15 A</p> <p>9332 0590 0000 black; 5 A</p> <p>9332 2280 0000 white; 5 A</p>	<table border="1"> <tr> <td>•</td><td>•</td><td></td><td>•</td><td>•</td><td></td><td></td><td></td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td></td><td>•</td><td>•</td><td></td><td></td><td></td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td></td><td>•</td><td>•</td><td></td><td></td><td></td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td></td><td>•</td><td>•</td><td></td><td></td><td></td><td>•</td><td>•</td> </tr> </table>	•	•		•	•				•	•	•	•		•	•				•	•	•	•		•	•				•	•	•	•		•	•				•	•
•	•		•	•				•	•																																		
•	•		•	•				•	•																																		
•	•		•	•				•	•																																		
•	•		•	•				•	•																																		
<p>Socket 45°, 13 A Contact-protected, GB</p> <p>Great Britain without fuse, for plug type: G</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9332 0540 0000 black</p> <p>9332 2230 0000 white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td></td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td></td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•		•		•	•	•	•	•	•	•		•		•	•	•	•	•																				
•	•		•		•	•	•	•	•																																		
•	•		•		•	•	•	•	•																																		
<p>Socket 45° Contact-protected, GB</p> <p>Great Britain with integrated fuse for plug type: G</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9332 0570 0000 black; 3,15 A</p> <p>9332 2260 0000 white; 3,15 A</p> <p>9332 0600 0000 black; 5 A</p> <p>9332 2290 0000 white; 5 A</p>	<table border="1"> <tr> <td>•</td><td>•</td><td></td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td></td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td></td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td></td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•		•		•	•	•	•	•	•	•		•		•	•	•	•	•	•	•		•		•	•	•	•	•	•	•		•		•	•	•	•	•
•	•		•		•	•	•	•	•																																		
•	•		•		•	•	•	•	•																																		
•	•		•		•	•	•	•	•																																		
•	•		•		•	•	•	•	•																																		

Description	Picture	Order Nr. & Specifications	Dock / R-Dock Dock Square FlipTop Push FlameDock One Port Port Push U- & V-Dock Up
<p>Socket 90°, 13 A Contact-protected, GB</p> <p>Great Britain without fuse, for plug type: G</p> <p>Installation dimensions: 75 x 50 mm incl. spacer plate: 25 mm</p>		<p>9330 4430 9000 black</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 100%;"></div> <div style="width: 100%; text-align: center;"> • </div> </div>
<p>Socket 90° Contact-protected, GB</p> <p>Great Britain with integrated fuse for plug type: G</p> <p>Installation dimensions: 75 x 50 mm incl. spacer plate: 25 mm</p>		<p>9330 4450 9000 black; 3,15 A</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 100%;"></div> <div style="width: 100%; text-align: center;"> • </div> </div>
<p>9330 4470 9000 black; 5 A</p>		<p>9330 4470 9000 black; 5 A</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 100%;"></div> <div style="width: 100%; text-align: center;"> • </div> </div>
<p>Socket 225°, 13 A Contact-protected, GB</p> <p>Great Britain without fuse, for plug type: G</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9332 2750 0000 black</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 100%;"></div> <div style="width: 100%; text-align: center;"> • </div> </div>
<p>Socket 225° Contact-protected, GB</p> <p>Great Britain with integrated fuse for plug type: G</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9332 2760 0000 black; 3,15 A</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 100%;"></div> <div style="width: 100%; text-align: center;"> • </div> </div>
<p>9332 2770 0000 black; 5 A</p>		<p>9332 2770 0000 black; 5 A</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 100%;"></div> <div style="width: 100%; text-align: center;"> • </div> </div>

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /
Socket 0°, 10 A without Contact-protection, AUS		9330 5240 0000 black	• • • • • •
Australia for plug type: I		9330 5270 0000 red	• • • • • •
Installation dimensions: 50 x 50 mm			
Socket 270°, 10 A without Contact-protection, AUS		9330 5890 0000 black	• • •
Australia for plug type: I			
Installation dimensions: 50 x 50 mm			
Socket 0°, 10 A Angled Outlet without Contact-protection, AUS		9330 4010 0000 black	•
Australia for plug type: I, Not suitable for angled plugs.		9330 4400 0000 red	•
Installation dimensions: 75 x 50 mm			

Dock / R-Dock
 Dock Square
 FlipTop Push
 FlameDock
 One Port
 Port Push
 U- & V-Dock
 Up

Description

Picture

Order Nr. & Specifications

**Socket 0°, 15 A
 without Contact-protection
 USA/CAN**

USA, Canada
 for plug type: B (NEMA, 5-15)

Installation dimensions: 50 x 50 mm



9330 5360 6600
 black



**Socket 60°, 15 A
 without Contact-protection
 USA/CAN**

USA, Canada
 for plug type: B

Installation dimensions: 50 x 50 mm



9330 5370 6600
 black



**Socket 0°, 15 A
 with Contact-protection,
 USA/ CAN**

USA, Canada
 for plug type: B

Installation dimensions: 50 x 50 mm



9332 3640 6600
 black




**Socket 60°, 15 A
 with Contact-protection,
 USA/ CAN**

USA, Canada
 for plug type: B

Installation dimensions: 50 x 50 mm



9332 3650 6600
 black




**Socket 0°, 15 A
 Angled Outlet
 with Contact-protection and hinged
 lid, USA/CAN**

USA, Canada
 for plug type: B
 Not suitable for angled plugs.






Installation dimensions: 75 x 50 mm

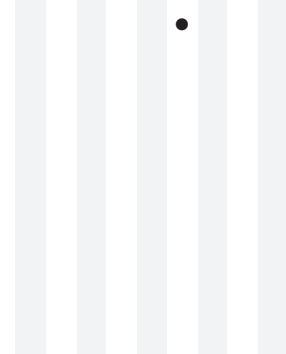




9332 3630 6600
 black








○No UL-listed product. Feasibility to be enquired individually.
 Technical changes and printing errors reserved. | Similar pictures.
 Power modules are only available completely assembled in EVOLine products.

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /
<p>Connector 16 A Wieland GST 18i3</p> <p>Socket GST 18i3 Snap-In for current output</p> <p>Installation dimensions: 25 x 50 mm</p>		9330 8990 0000 black	● ● ● ● ●
<p>Connector 16 A WAGO WINSTA MIDI</p> <p>Socket WAGO WINSTA Snap-In for current output</p> <p>Installation dimensions: 25 x 50 mm</p>		9330 8970 0000 black	● ● ● ● ●
<p>USB-A Charger</p> <p>USB Type A Charger, charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		9331 5580 0000 5 V / 1 A, black 9331 7040 0000 5 V / 1 A, white 9332 1330 0000 5 V / 2.1 A, black 9332 1320 0000 5 V / 2.1 A, white	● ●
<p>Double USB-A Charger</p> <p>2x USB Type A Charger, charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		9332 2960 0000 5 V / 2.1 A max., black 9332 2970 0000 5 V / 2.1 A max., white	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●
<p>USB-C Charger</p> <p>USB Type C Charger, charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		9332 4690 0000 5 V / 2,1 A, black 9332 4700 0000 5 V / 2,1 A, white	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●

Technical changes and printing errors reserved. | Similar pictures.
Power modules are only available completely assembled in EVoline products.













Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FlameDock / One / Port / Port Push / U- & V-Dock / Up
<p>Power Supply Module with cable and EVOLine PlugFix</p> <p>Type E+F i.e. Germany 16 A, 3 x 1.5 mm² Plug with extra low profile and movable plug face.</p>		<p>9331 0890 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p>
<p>Power Supply Module with cable and angled plug</p> <p>Type E+F i.e. Germany, France, Belgium, Poland 16 A, 3 x 1.5 mm²</p>		<p>9330 2020 0000 Cable length 3 m, black</p> <p>9332 2670 0000 Cable length 3 m, white</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p>
<p>Power Supply Module with cable and plug</p> <p>Type J 3 x 1,5 mm² i.e. Switzerland</p>		<p>9330 2030 0000 10 A, Cable length 3 m, black</p> <p>9330 2040 0000 16 A, Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p>
<p>Power Supply Module with Cable and Overload Circuit Breaker</p> <p>Plug type J (T12) Power Supply Module with resettable overload switch 10 A 3 x 1,5 mm²</p>		<p>9332 1090 0000 Cable length 3 m, black mounted to product</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p>
<p>Power Supply Module with cable and angled plug</p> <p>Type G, i.e. Great Britain 13 A, 3 x 1,5 mm²</p>		<p>9330 2070 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p>

EVOLine® Power Supply Modules

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTopPush / FrameDock / One / Port / PortPush / U- & V-Dock / Up /
Power Supply Module with cable and angled plug Type K 13 A, 3 x 1.5 mm ² Denmark. Standard		9330 2050 0000 Cable length 3 m, black 9330 2060 0000 Plug, not angled, EDP-coded, Cable length 3 m black Cable extension per meter	● ● ● ● ● ● ● ● ●
Power Supply Module with cable and Plug Plug Type L i.e. Italy 16 A, 3 x 1.5 mm ²		9330 2080 0000 Cable length 3 m, black Cable extension per meter	● ● ● ● ● ● ● ● ●
Power Supply Module with cable and Plug Type B 115 V. 15 A, AWG 14 i.e. USA, Canada (UL/CSA)		9330 9160 6600 Cable length 3 m, black Cable extension on request	● ○ ○ ● ○ ● ○ ● ○
Power Supply Module with cable and Plug Type B 115 V. 15 A, AWG 14 i.e. Australia		9330 9130 0000 Cable length 3 m, black Cable extension on request	● ● ● ● ● ● ● ● ●
Power Supply Module with cable and ferrules 16 A, 3 x 1,5 mm ²		9330 9510 0000 Cable length 3 m, black Cable extension per meter	● ● ● ● ● ● ● ● ●

Technical changes and printing errors reserved. | Similar pictures.

/ Dock / R-Dock
 / Dock Square
 / FlipTop Push
 / FrameDock
 / One
 / Port
 / Port Push
 / U- & V-Dock
 / Up

Description	Picture	Order Nr. & Specifications								
Power Supply Module with cable and connector 16 A, 3 × 1,5 mm ² Cable length 3 m Colour: black		9330 8420 0000 Wieland GST18 plug without lock	•	•	•	•	•	•	•	•
		9331 2490 0000 Wieland GST18 plug with lock	•	•	•	•	•	•	•	•
		9330 8440 0000 WAGO WINSTA MIDI plug without lock	•	•	•	•	•	•	•	•
		9332 4240 0000 Neutrik powerCON plug with lock	•	•	•	•	•	•	•	•
		Cable extension per meter								
Power Output Module with cable and connector 16 A, 3 × 1,5 mm ² Cable length 3 m Colour: black		9330 5810 0000 GST18i3 socket without lock	•	•	•	•	•	•	•	
		9331 2500 0000 GST18i3 socket with lock	•	•	•	•	•	•	•	
		9330 5830 0000 WAGO WINSTA MIDI socket without lock	•	•	•	•	•	•	•	
		9332 4250 0000 Neutrik powerCON socket with lock	•	•	•	•	•	•	•	
		Cable extension per meter								
Connector 3-pole Plug Installed in the end cap Colour: black		9330 2680 0000 Plug GST 18i3	•	•	•				•	
		9330 2660 0000 Plug WAGO WINSTA MIDI	•	•	•				•	
Connector 3 pole Socket Snap-In, installed in the end cap Colour: black		9330 8960 0000 Socket GST 18i3	•	•	•				•	
		9330 8940 0000 Socket WAGO WINSTA MIDI	•	•	•				•	

Technical changes and printing errors reserved. | Similar pictures.

Description

Picture

Specifications

Order Number

Power supply 65 W* with euro plug

Entrance:

100 - 240 V AC, 50/60 Hz 1 A max.

Output I:

USB-A connection: 5 V / 2.1 A (10.5W)

Output II:

USB-C connection: 5 V / 3 A (15 W),
9 V / 3 A (27 W), 12 V / 3 A (36 W),
15 V / 3 A (45 W), 20 V / 3.25 A (65 W)



6599 0912 3900

Capable of charging two devices at the same time (USB-C port and 2.1 A USB-A port), maximum 65 W total power.

Overcharge, deep discharge, over-load and short circuit protection

Dimensions: 107 x 70 x 29 mm

Universal power supply 18 W * with international plug adapters

US, AU / CN, UK and EU plugs

Entrance:

100 - 240 V AC, 50/60 Hz 1 A max.

Output:

USB-A connection: 5 V / 3 A (15 W),
9 V / 2 A (18 W), 12 V / 1.5 A (18 W)
max.






1599 0912 4000

Quick Charge 3.0 compatible.

Overcharge, deep discharge, over-load and short circuit protection

Dimensions: 57 x 51 x 28 mm

* The power supply generally charges all common products. Due to the large number of The function cannot be guaranteed in every case for providers and devices.

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTopPush / FrameDock / One / Port / PortPush / U- & V-Dock / Up /																				
<p>RJ45 Data Connector Reichle & De-Massari</p> <p>with Cable and Plug / Socket</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9331 2150 0000 RJ45 CAT6 shielded 0.2 m Cable, Socket</p> <p>9330 8270 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p> <p>9330 7860 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 0020 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p>	<table border="1"> <tr> <td>●</td> <td>●</td> <td>●</td> <td></td> <td></td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td></td> <td></td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td></td> <td></td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td></td> <td></td> </tr> </table>	●	●	●			●	●	●			●	●	●			●	●	●		
●	●	●																					
●	●	●																					
●	●	●																					
●	●	●																					
<p>RJ45 Data Connector Reichle & De-Massari</p> <p>Angled Outlet with labeling field with Cable and Plug</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 8200 0000 RJ45 CAT6 shielded 0.2 m Cable, Socket (RJ45)</p> <p>9331 0010 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p> <p>9330 6140 0000 RJ45 CAT6 shielded 3 m Cable Plug</p> <p>9331 0030 0000 RJ45 CAT6A shielded 3 m Cable Plug</p>	<table border="1"> <tr> <td></td> <td></td> <td></td> <td>●</td> <td>●</td> </tr> <tr> <td></td> <td></td> <td></td> <td>●</td> <td>●</td> </tr> <tr> <td></td> <td></td> <td></td> <td>●</td> <td>●</td> </tr> <tr> <td></td> <td></td> <td></td> <td>●</td> <td>●</td> </tr> </table>				●	●				●	●				●	●				●	●
			●	●																			
			●	●																			
			●	●																			
			●	●																			
<p>2x RJ45 Data Connector Reichle & De-Massari</p> <p>Angled Outlet with labeling field with Cable and Plug / Socket</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 2590 0000 RJ45 CAT6 shielded 0.2 m Cable, Socket (RJ45)</p> <p>9330 4340 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p> <p>9330 1230 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 0040 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p>	<table border="1"> <tr> <td></td> <td></td> <td></td> <td>●</td> <td>●</td> </tr> <tr> <td></td> <td></td> <td></td> <td>●</td> <td>●</td> </tr> <tr> <td></td> <td></td> <td></td> <td>●</td> <td>●</td> </tr> <tr> <td></td> <td></td> <td></td> <td>●</td> <td>●</td> </tr> </table>				●	●				●	●				●	●				●	●
			●	●																			
			●	●																			
			●	●																			
			●	●																			

Dock / R-Dock
 Dock Square
 FlipTop Push
 FrameDock
 One Port
 Port Push
 U- & V-Dock
 Up

Description

Picture

Order Nr. & Specifications


**RJ45 Modular Adaptor
 ELBRO**

Modular Adaptor , 1:1 intercon-
 nected

Installation Dimensions:
 25 x 50 mm



- 9330 6550 0000
 RJ45 CAT6 unshielded
- 9330 8410 0000
 (RJ45) CAT6 shielded
- 9331 4080 0000
 (RJ45) CAT6A shielded

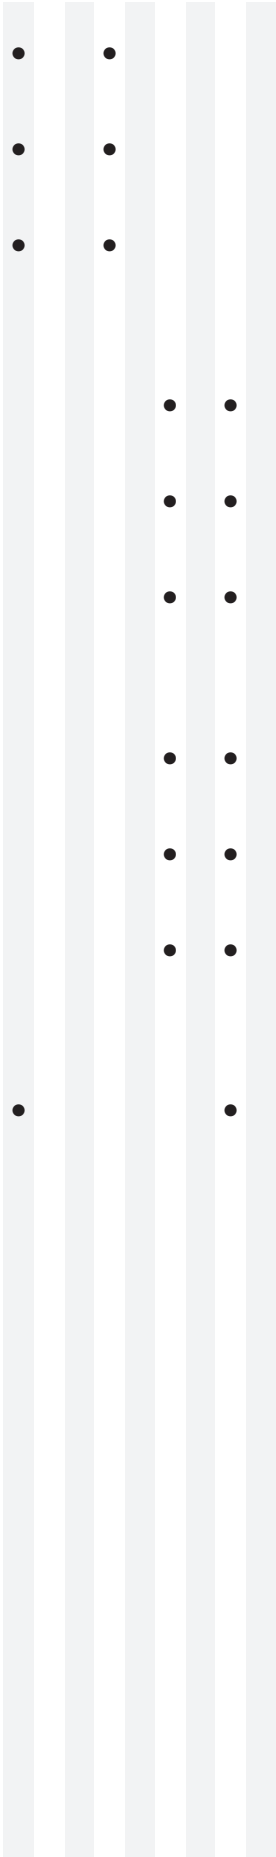

**RJ45 Modular Adaptor
 ELBRO**

Angled Outlet
 with labeling field.
 Modular Adaptor, 1:1 interconnected

Installation Dimensions:
 50 x 50 mm



- 9330 6560 0000
 (RJ45) CAT6 unshielded
- 9330 5880 0000
 (RJ45) CAT6 shielded
- 9331 4090 0000
 (RJ45) CAT6A shielded

**2x RJ45 Modular Adaptor
 ELBRO**

Angled Outlet
 with Labeling Field
 Modular Adaptor, 1:1 interconnected

Installation Dimensions:
 50 x 50 mm



- 9330 6570 0000
 (RJ45) CAT6 unshielded
- 9330 3920 0000
 (RJ45) CAT6 shielded
- 9331 4100 0000
 (RJ45) CAT6A shielded

**2x RJ45 Modular Adaptor
 ELBRO**

Modular Adaptor, 1:1 interconnected
 Angled: 90°

Installation Dimensions:
 25 x 50 mm



- 9331 4870 0000
 (RJ45) CAT6 shielded





Description	Picture	Order Nr. & Specifications	Dock / R-Dock Dock Square FlipTop Push FrameDock One Port Port Push U- & V-Dock Up
VGA-Connector 15 pole HDD socket with screw terminals, Installation dimensions: 25 x 50 mm		9330 0810 0000 with 3 m cable and plug	• • •
VGA-Connector Angled outlet with labeling field 15 pole HDD socket with screw terminals, Installation dimensions: 50 x 50 mm		9330 2370 0000 with 3 m cable and plug	• •
VGA- and Audio Connector 1x VGA Connector. 15 pole HDD socket with screw terminals, 1x Stereo Jack socket 3.5 mm Installation dimensions: 25 x 50 mm		9330 7920 0000 with 3 m cables and plugs	• • •
VGA and Audio Connector Angled outlet with labeling field 1x VGA Connector, 15 pole HDD socket, with screw terminals. 1x Stereo Jack socket 3.5mm Instal- lation dimensions: 50 x 50 mm		9331 5370 0000 with 3 m cables and plugs	• •





Description	Picture	Order Nr. & Specifications	Dock / R-Dock Dock Square FlipTop Push FrameDock One Port Port Push U- & V-Dock Up
<p>Audio Connector 3.5mm</p> <p>1 x Stereo Jack socket 3.5 mm Installation dimensions: 25 x 50 mm</p>		<p>9330 0910 0000 with 3 m cable and plug</p>	• • •
<p>Audio Connector 3.5mm</p> <p>Angled outlet with labeling field. 1 x Stereo Jack socket 3.5 mm Installation dimensions: 50 x 50 mm</p>		<p>9330 2460 0000 with 3 m cable and plug</p>	• • •
<p>DVI-I Connector</p> <p>Dual Link. 24+5 pole. for digital and analogue signals Installation dimensions: 25 x 50 mm</p>		<p>9331 7730 0000 with 0.2 m Cable and Socket</p> <p>9331 7700 0000 with 3 m Cable and Plug</p>	• • • •
<p>DVI-I Connector</p> <p>Dual Link. 24+5 pole. for digital and analogue signals Angled outlet with labeling field Installation dimensions: 50 x 50 mm</p>		<p>9331 7740 0000 with 0.2 m Cable and Socket</p> <p>9331 7710 0000 with 3 m Cable and Plug with 5 m Cable and Plug</p>	• • • • • •

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / / Dock Square / / FlipTopPush / / FrameDock / / One / / Port / / PortPush / / U- & V-Dock / / Up /
HDMI-Connector HDMI connector with gilded contacts. Installation dimensions: 25 x 50 mm		9330 6060 0000 HDMI 1.4 connector with 0.3 m Cable and Socket 9331 8940 0000 HDMI 2.0 connector with 0.2 m Cable and Socket 9330 6070 0000 HDMI 1.4 connector with 3 m Cable and Plug with 5 m Cable and Plug 9332 2800 0000 HDMI 2.0 connector with 3 m Cable and Plug	• • • • • • • • • • • •
HDMI-Connector Angled outlet with labeling field HDMI connector with gilded contacts. Installation dimensions: 50 x 50 mm		9330 6080 0000 HDMI 1.4 connector with 0.3 m Cable and Socket 9331 8950 0000 HDMI 2.0 connector with 0.2 m Cable and Socket 9330 6090 0000 HDMI 1.4 connector with 3 m Cable and Plug with 5 m Cable and Plug 9332 2810 0000 HDMI 2.0 connector with 3 m Cable and Plug	• • • • • • • • • • •
DisplayPort-Connector for digital signals DP 1.2 compliant. Installation dimensions: 25 x 50 mm		9331 7510 0000 with 0.4 m Cable and Socket	• •
DisplayPort-Connector Angled outlet with labeling field for digital signals DP 1.2 compliant. Installation dimensions: 50 x 50 mm		9331 7520 0000 with 0.4 m Cable and Socket	• •




Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock One / Port / Port Push / U- & V-Dock / Up /
<p>USB 3.0 Connector</p> <p>USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Installation dimensions: 25 x 50 mm.</p>		<p>9331 8620 0000 0.2 m Cable and Socket</p> <p>9331 1450 0000 1 m USB Cable Plug USB 3 Type A</p> <p>9331 1460 0000 3 m USB Cable Plug USB 3 Type A</p>	<p>• • •</p> <p>• • •</p> <p>• • •</p>
<p>USB 3.0 Connector</p> <p>USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm</p>		<p>9331 8630 0000 0.2 m Cable and Socket</p> <p>9331 1460 0000 1 m USB Cable, Plug USB 3 Type A</p> <p>9331 1460 0000 3 m USB Cable Plug USB 3 Type A</p>	<p>• •</p> <p>• •</p> <p>• •</p>
<p>USB 3.1 Connector</p> <p>USB 3.1 type C only suitable for power supply. Max. Current: 3A.</p> <p>Installation dimensions: 15 x 50 mm</p>		<p>9331 9710 0000 0.2 m USB Cable Socket USB 3.1 Type C</p>	<p>• •</p>
<p>USB 3.1 Connector</p> <p>USB 3.1 type C Angled outlet with labeling field. only suitable and power supply. Max. Current: 3A.</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 9870 0000 0.2 m USB Cable Socket USB 3.1 Type C</p>	<p>• •</p>

Description	Picture	Order Nr. & Specifications	Dock / R-Dock Dock Square FlipTop Push FrameDock One Port Port Push U- & V-Dock Up
<p>USB 3.1 Connector</p> <p>USB 3.1 Type C Suitable for power and data supply. 3 A / max. 60 Watt up to 5 Gbit/s Daten</p> <p>Installation dimensions: 25 × 50 mm</p>		<p>9332 5390 0000 0,5 m USB cable and plug</p>	
<p>USB 3.1 Connector</p> <p>USB 3.1 Type C Suitable for power and data supply. 3 A / max. 60 Watt up to 5 Gbit/s Daten Angled outlet with labeling field.</p> <p>Installation dimensions: 50 × 50 mm</p>		<p>9332 5520 0000 0,5 m USB cable and plug</p>	
<p>2x USB 3.1 Connector</p> <p>USB 3.1 Type C Suitable for power and data supply. 3 A / max. 60 Watt up to 5 Gbit/s Daten Angled outlet with labeling field</p> <p>Installation dimensions: 50 × 50 mm</p>		<p>9332 5530 0000 0,5 m USB cable and plug</p>	



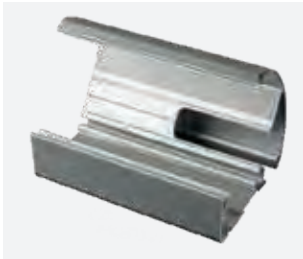

Description	Picture	Order Nr. & Specifications	Dock / R-Dock Dock Square FlipTop Push FlameDock One Port Port Push U- & V-Dock Up
<p>Audio Connector and stainless steel push-button with ring LED</p> <p>1x Stereo Jack Socket 3.5 mm 1x Push-Button Operating voltage: 24 V_{AC/DC} Operating current: 10 mA Angled outlet and labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 9490 0000</p> <p>Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p>Push-Button with 3 m Cable without plug</p>	• •
<p>Audio Connector and Data Socket Reichle & De-Massari Cat. 6</p> <p>1x Stereo Jack socket 3.5 mm 1x Data Socket with cable Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7610 0000</p> <p>Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p>Data RJ45 Cat. 6 Socket with 3 m Cable, shielded and RJ45 Plug</p>	• •
<p>Audio Connector and Data Socket Elbro</p> <p>1x Cat.6 Modular-Adaptor, shielded 1x Stereo Jack socket 3.5 mm Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7800 0000</p> <p>Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p>Data Modular-Adaptor RJ45 (without Cable)</p>	• •
<p>HDMI and Audio Socket 3.5mm</p> <p>1x HDMI 1.4 connector with gilded contacts. 1x Stereo Jack socket 3.5 mm Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 5100 0000</p> <p>Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p>HDMI with 3 m Cable and Plug</p>	• •

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /																																								
<p>Cable Outlet Module</p> <p>1 cable passage Colour: black</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 3790 0000 Ø 8 mm</p> <p>9331 0560 0000 Ø 12 mm</p> <p>9331 1670 0000 Ø 17 mm</p> <p>Additional diameters on demand</p>	<table border="1"> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•																												
•	•	•	•																																								
•	•	•	•																																								
•	•	•	•																																								
<p>Cable Outlet Module</p> <p>2 cable passages Colour: black</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 3800 0000 Ø 8 mm</p> <p>9331 1930 0000 Ø 12 mm</p> <p>Additional diameters on demand</p>	<table border="1"> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> </table>	•	•	•	•	•	•	•	•																																
•	•	•	•																																								
•	•	•	•																																								
<p>Cable Guide Modul</p> <p>Clamp for 3 cables 2x 8 mm 1x 12 mm Colour: black</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 3600 0000 Holder for 3 Cables</p>	<table border="1"> <tr> <td></td> <td></td> <td></td> <td>•</td> </tr> </table>				•																																				
			•																																								
<p>Cable assortment</p> <p>3.0 m cables 2 plugs</p> <p>cable extension and variations available on request</p>		<p>9331 0350 0000 HDMI Cable</p> <p>9331 3060 0000 VGA Cable</p> <p>9331 3760 0000 Displayport Cable</p> <p>9331 3720 0000 Audio Stereo Cable</p> <p>9331 1060 0000 PatchCable CAT6, shielded</p> <p>9331 9810 0000 USB 3.0 Cable (Type A)</p>	<table border="1"> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•																																				
•	•	•	•	•	•	•	•																																				
•	•	•	•	•	•	•	•																																				
•	•	•	•	•	•	•	•																																				
•	•	•	•	•	•	•	•																																				

Dock / R-Dock
 Dock Square
 Flip Square
 Flip Top Push
 FrameDock
 One
 Port
 Port Push
 U- & V-Dock
 Up





Description	Picture	Order Nr. & Specifications					
<p>Installation Space</p> <p>Profile with black plastic cover to enable later insertation of additional modules.</p>		9330 7990 0000 Profile length: 15 mm	●	●	●	●	
		9330 5620 0000 Profile length: 25 mm	●	●	●	●	
		9330 5630 0000 Profile length: 50 mm	●	●	●	●	
		9330 5640 0000 Profile length: 75 mm	●	●	●	●	
		9330 5650 0000 Profile length: 100 mm	●	●	●	●	
		9330 6390 0000 Profile length: 150 mm	●	●	●	●	
<p>Labeling Field</p> <p>For individual labeling of modules.</p> <p>Installation dimensions: 15 x 50 mm</p>		9330 9000 0000 black	●	●	●	●	
<p>Cover Plate</p> <p>made of black plastic, provides distance between current modules, future changes are not possible</p>		9330 0150 0000 Dimensions: 5 x 50 mm	●	●	●	●	
		9330 7980 0000 Dimensions: 15 x 50 mm	●	●	●	●	
		9330 0920 0000 Dimensions: 25 x 50 mm	●	●	●	●	
		9330 0130 0000 Dimensions: 50 x 50 mm	●	●	●	●	
		9330 0550 0000 Dimensions: 75 x 50 mm	●	●	●	●	
		9330 0110 0000 Dimensions: 100 x 50 mm	●	●	●	●	
		9330 7650 0000 Dimensions: 150 x 50 mm	●	●	●	●	





EVoline® Switches and Push-Buttons




Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FlipTop Push</i> <i>/ FrameDock</i> <i>/ One</i> <i>/ Port</i> <i>/ Port Push</i> <i>/ U- & V-Dock</i> <i>/ Up</i>
<p>ON / OFF switch</p> <p>230 V, 2-pole, illuminated in blue. For switching built-in sockets or for external assignment. Installation dimensions: 50 x 50 mm</p>		9330 0010 0000	● ● ● ● ● ● ●
<p>ON / OFF switch</p> <p>230 V, 2-pole, illuminated in blue. With lamp symbol For switching built-in sockets or for external assignment. Installation dimensions: 50 x 50 mm</p>		9330 6650 0000	● ● ● ● ● ● ●
<p>ON / OFF switch</p> <p>230 V, 2-pole, illuminated in blue. With lamp symbol For switching built-in sockets or for external assignment. Installation dimensions: 50 x 50 mm</p>		9330 6660 0000	● ● ● ● ● ● ●
<p>1x Stainless steel pushbutton with blue LED ring</p> <p>Pushbutton potential-free Switching data: 240 V ≈ / 3 A LED can be connected separately. LED operating data: 24 V ≈ / 7 mA</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 9300 0000 with Screw terminals</p> <p>9331 9240 0000 with 3 m cable and ferrules</p>	● ● ● ● ● ● ● ● ● ● ● ● ● ●

Technical changes and printing errors reserved. | Similar pictures.

/ Dock / R-Dock
 / Dock Square
 / FlipTop Push
 / FrameDock
 / One
 / Port
 / Port Push
 / U- & V-Dock
 / Up

Description	Picture	Order Nr. & Specifications	
<p>1x Stainless steel pushbutton with blue LED ring, angled outlet</p> <p>Pushbutton potential-free Switching data: 240 V = / 3 A LED can be connected separately. LED operating data: 24 V = / 7 mA, labeling field Installation dimensions: 50 x 50 mm</p>		<p>9331 9320 0000 with Screw terminals</p> <p>9331 9260 0000 with 3 m cable and ferrules</p>	<div style="display: flex; justify-content: space-between; width: 100%;"> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> </div> <div style="display: flex; justify-content: space-between; width: 100%; margin-top: 10px;"> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> </div>
<p>1x Stainless steel pushbutton with blue LED ring, angled outlet</p> <p>Pushbutton potential-free Switching data: 240 V = / 3 A LED can be connected separately. LED operating data: 24 V = / 7 mA Angled outlet with labeling field Installation dimensions: 50 x 50 mm</p>		<p>9331 9330 0000 with Screw terminals</p> <p>9331 9270 0000 with 3 m cable and ferrules</p>	<div style="display: flex; justify-content: space-between; width: 100%; margin-top: 10px;"> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> </div> <div style="display: flex; justify-content: space-between; width: 100%; margin-top: 10px;"> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> </div>
<p>Master / Slave Switch 2-pole</p> <p>controls downstream sockets (slave sockets), available only as combination of upstream master and downstream slave sockets Switching threshold: adjustable from 20 to 100 mA, Rated voltage: 250 V, Rated current: 16 A, 2-pole, Protection class IP20, black plastic frame Installation dimensions: 75 x 50 mm</p>		<p>9330 6160 0000</p>	<div style="display: flex; justify-content: space-between; width: 100%; margin-top: 10px;"> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> </div> <div style="display: flex; justify-content: space-between; width: 100%; margin-top: 10px;"> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> </div>
<p>KNX Module, 4x</p> <p>voltage supply connection through EIB terminal, 4 x pushbutton, LED illuminated frame: black installation dimensions: 50 x 50 mm</p>		<p>9332 0330 0000</p>	<div style="display: flex; justify-content: space-between; width: 100%; margin-top: 10px;"> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> </div> <div style="display: flex; justify-content: space-between; width: 100%; margin-top: 10px;"> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> <div style="width: 20%;"></div> </div>

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /															
<p>Residual Current Device</p> <p>RCD/RCCB 2-pole characteristic B, type A</p> <p>Installation dimensions: 100 x 50 mm</p>		<p>9330 0370 0000 Rated current: 25 A Rated fault current: 30 mA</p> <p>9330 8260 0000 Rated current: 16 A Rated fault current: 10 mA</p>	<table border="1"> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•					
•	•	•	•	•														
•	•	•	•	•														
<p>Circuit Breaker MCB</p> <p>2-pole characteristic B</p> <p>Installation dimensions: 100 x 50 mm</p>		<p>9330 1140 0000 Rated current: 10 A</p> <p>9330 1150 0000 Rated current: 13 A</p> <p>9330 0400 0000 Rated current: 16 A</p>	<table border="1"> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•														
•	•	•	•	•														
•	•	•	•	•														
<p>Surge Protector</p> <p>With optical indicator</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 4770 0000 rated leakage current 1,5 kA maximum leakage current 5 kA,</p>	<table border="1"> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> </table>	•	•	•	•	•	•	•								
•	•	•	•	•	•	•												
<p>Overvoltage protector</p> <p>Model like Wieland GST 18i3 Protection level UP L/N PE 1.5KV</p>		<p>1599 0910 4000</p>	<table border="1"> <tr> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> </table>	•	•	•	•	•	•	•								
•	•	•	•	•	•	•												

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FlameDock One / Port / Port Push / U- & V-Dock / Up /
<p>Overload Circuit Breaker</p> <p>required for 3 sockets or more in Australia. 1-pole. Type: Sliding switch</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9330 5840 0000 Australien 10 A, 250 V</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p>Overload Circuit Breaker</p> <p>Switch-on overload switch Installation dimensions: 25 x 50 mm</p>		<p>9332 1080 0000 Switzerland Fuse: 10 A, 230 V~</p> <p>9332 0380 6600 U.S.A. (from the 4th socket) Fuse: 15 A, 125 V~</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p>Power Supply Module with Cable and Overload Circuit Breaker</p> <p>Plug Type: J (T13) Switch-on overload switch (10 A) 3 x 1,5 mm² e.g. Schweiz</p>		<p>9332 1090 0000 Cable length 3 m mounted to product</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>

How to change Interchangeable Modules

Both the FlipTop *Push* and the FrameDock can be individually equipped with data- and multimedia modules.

Should the usage requirements change in the workspace over time, data modules and cable can be replaced without the Port Push, DockSquare, FlipTop *Push* or FrameDock must be removed previously. Of course you can replace the modules between the profiles. *



Releasing the interchangeable module with simple instruments like screwdrivers. Now another interchangeable module can be mounted to the System
(this example: FrameDock).



* Except for Port Push.



Combination of Interchangeable Modules

Your usage requirements are as flexible as you are.


So that your workspace keeps tailored to you, you always can equip your system with a new interchangeable module.

Single Modules

Interchangeable Modulee

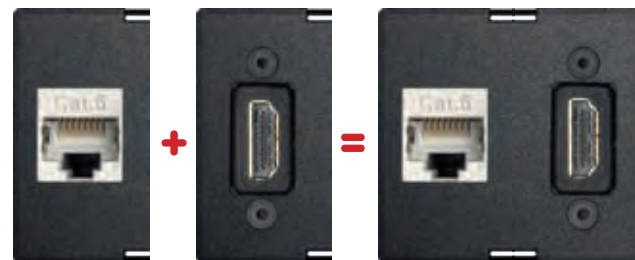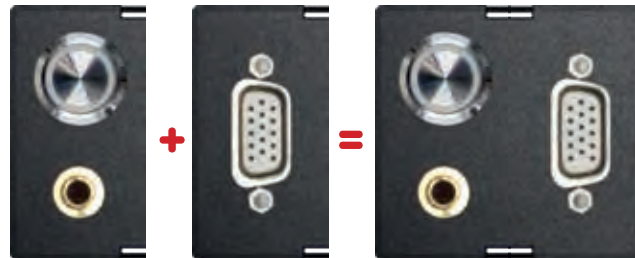



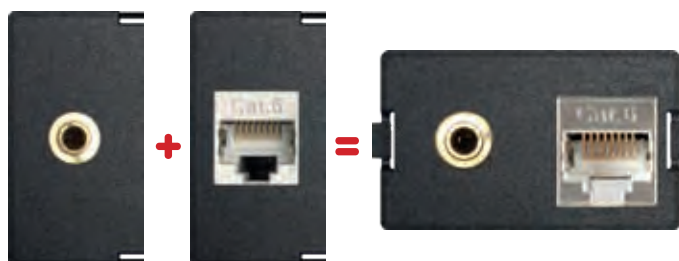


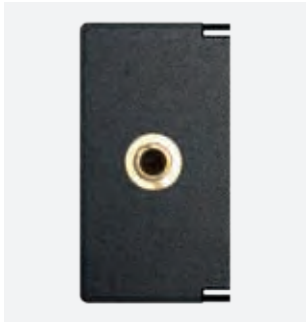

Examples for the configuration of the interchangeable Modules of FlipTop Push, FrameDock and Dock Square






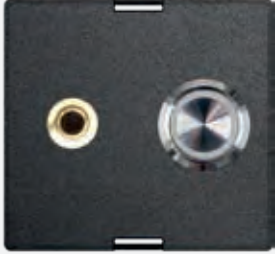
Examples for the configuration of the interchangeable Modules of Port Push




FlipTop Push
FrameDock
V-Dock
Dock Square
Port Push
U-Dock

Description	Picture	Order Nr. & Specifications					
RJ45 Modular Adaptor ELBRO		9331 9010 0000 RJ45 CAT6 unshielded socket to socket (RJ45), without cable	●	●	●	●	●
RJ45 to RJ45, 1:1 interconnected for Patch cable.		9331 8090 0000 RJ45 CAT6 shielded socket to socket (RJ45), without cable	●	●	●	●	●
1/2 Module		9331 8290 0000 RJ45 CAT6A shielded socket to socket (RJ45), without cable	●	●	●	●	●
Data Plate with Data Socket Reichle & De-Massari		9331 8420 0000 RJ45 Cat6 shielded with 0,2 m cable and socket	●	●	●	●	●
With Cable		9331 8410 0000 RJ45 Cat6 unshielded with 3m cable and plug	●	●	●	●	●
1/2 Module		9331 8070 0000 RJ45 Cat6 shielded with 3m cable and plug	●	●	●	●	●
		9331 8400 0000 RJ45 Cat6A shielded with 3m cable and plug	●	●	●	●	●
Data Plate with Data Socket Reichle & De-Massari		9331 8420 2200 RJ45 Cat6 shielded with 0,2 m cable and socket	●	●	●	●	
With Cable		9331 8410 2200 RJ45 Cat6 unshielded with 3m cable and plug	●	●	●	●	
1/1 Module		9331 8070 2200 RJ45 Cat6 shielded with 3m cable and plug	●	●	●	●	
		9331 8400 2200 RJ45 Cat6A shielded with 3m cable and plug	●	●	●	●	





Description	Picture	Order Nr. & Specifications	/ Flip Top Push / Frame Dock / V-Dock / Dock Square / Port Push / U-Dock /
VGA-Connector 15 pole HDD socket with screw connector 1/2 Module		9331 8550 0000 with socket–socket (without cable) 9331 8430 0000 with 0.2 m cable and socket 9331 8100 0000 with 3 m cable and plug	● ● ● ● ● ● ● ● ● ● ● ● ● ● ●
VGA-Connector 15 pole HDD socket with screw connector 1/1 Module		9331 8550 2200 with socket–socket (without cable) 9331 8430 2200 with 0.2 m cable and socket 9331 8100 2200 with 3 m cable and plug	● ● ● ● ● ● ● ● ● ● ● ● ● ● ●
Audio Connector 3,5 mm 1x Stereo Jack socket 3.5 mm 1/2-Module		9331 8220 0020 with 0.2 m cable and socket 9331 8220 0000 with 3 m cable and socket 9331 8210 0000 3 m cable and plug	● ● ● ● ● ● ● ● ● ● ● ● ● ● ●
Audio Connector 3,5 mm 1x Stereo Jack socket 3.5 mm 1/2-Module		9331 8220 2220 with 0.2 m cable and socket 9331 8220 2200 with 3 m cable and socket 9331 8210 2200 with 3 m cable and plug	● ● ● ● ● ● ● ● ● ● ● ● ● ● ●

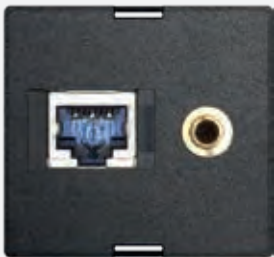FlipTop Push
FrameDock
V-Dock
Dock Square
Port Push
U-Dock




Description	Picture	Order Nr. & Specifications	● ● ● ● ●
<p>Stainless steel pushbutton with blue LED ring</p>		<p>9331 8870 0000 with Screw terminals</p>	● ● ● ● ●
<p>Pushbutton potential-free Switching data: 240 VAC/DC, 3 A LED can be connected separately. LED operating data: 24 VAC/DC, 7 mA</p>		<p>9331 8850 0000 with 3 m cable</p>	● ● ● ● ●
<p>1/2 Module</p>			
<p>Stainless steel pushbutton with blue LED ring</p>		<p>9331 8870 2200 with Screw terminals und blauer Ring-LED</p>	● ● ● ●
<p>Pushbutton potential-free Switching data: 240 V = / 3 A LED can be connected separately LED operating data: 24 V = / 7 mA</p>		<p>9331 8850 2200 with 3 m cable</p>	● ● ● ●
<p>1/1 Module</p>			
<p>Audio connector and stainless steel pushbutton with blue LED ring</p>		<p>9331 8880 0000 Audio 3 m cable</p>	● ● ● ● ●
<p>1x stereo jack socket 3.5 mm 1x pushbutton, potential-free Switching data: 240 V = / 3 A LED can be connected separately LED operating data: 24 V = / 7 mA</p>		<p>Pushbutton 3 m cable</p>	
<p>1/2 module</p>			
<p>Audio connector and stainless steel pushbutton with blue LED ring</p>		<p>9331 8880 2200 Audio 3 m cable</p>	● ● ● ●
<p>1x stereo jack socket 3.5 mm 1x pushbutton, potential-free Switching data: 240 V = / 3 A LED can be connected separately LED operating data: 24 V = / 7 mA</p>		<p>Pushbutton 3 m cable</p>	
<p>1/1 module</p>			

Description	Picture	Order Nr. & Specifications	/ FlipTop Push / FrameDock / V-Dock / Dock Square / Port Push / U-Dock /
<p>HDMI-, VGA- and Audioconnector</p> <p>HDMI 1.4 socket with gilded Contacts, 15 pole HDD VGA socket, Stereo Jack socket with cable</p> <p>1/1 Module</p>		<p>9331 9000 0000 HDMI, VGA, Audio: Each with 3 m cable and plug</p> <p>9331 9000 0000 HDMI, VGA, Audio: Each with 5 m cable and plug</p> <p>9331 9410 0000 HDMI, VGA, Audio: 0,2 m cable and socket</p>	<p>• • • •</p> <p>• • • •</p> <p>• • • •</p>
<p>Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari</p> <p>1 × Stereo Jack socket, 1 × Data socket</p> <p>1/2-Module</p>		<p>9331 8680 0000 Audio: Connector 3,5 mm with 3 m cable and plug</p> <p>Data RJ45 Cat.6 shielded 3 m cable and plug</p>	<p>• • • • •</p>
<p>Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari</p> <p>1 × Stereo Jack socket, 1 × Data socket</p> <p>1/1-Module</p>		<p>9331 8680 2200 Audio: Connector 3,5 mm with 3 m cable and plug</p> <p>Data RJ45 Cat.6 shielded 3 m cable and plug</p>	<p>• • • •</p>




FlipTop Push
 FrameDock
 V-Dock
 Dock
 Dock Square
 Port Push
 U-Dock




Description	Picture	Order Nr. & Specifications	
<p>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</p> <p>1 × Stereo Jack socket 1 × Modular adaptor RJ45 RJ45, 1:1 interconnected for Patch cable</p> <p>1/2 Module</p>		<p>9331 8690 0000 Audio: Connector 3,5 mm with 3 m cable</p> <p>Data socket to socket RJ45 Cat.6 shielded</p> <p>9332 0110 0000 Audio: Connector 3,5 mm without cable</p> <p>Data socket to socket RJ45 Cat.6 shielded</p>	
<p>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</p> <p>1 × Stereo Jack socket, 1 × Cat.6 Module adaptor</p> <p>1/1 Module</p>		<p>9331 8690 2200 Audio: Connector 3,5 mm with 3 m cable</p> <p>Data RJ45 Cat.6 shielded socket to socket RJ45</p> <p>9332 0110 2200 Audio: Connector 3,5 mm without cable</p> <p>Data RJ45 Cat.6 shielded socket to socket RJ45</p>	

Technical changes and printing errors reserved. | Similar pictures.


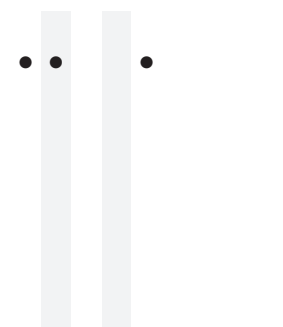

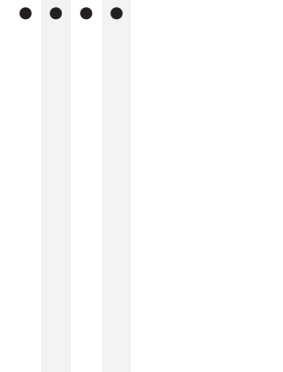
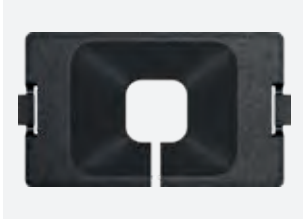
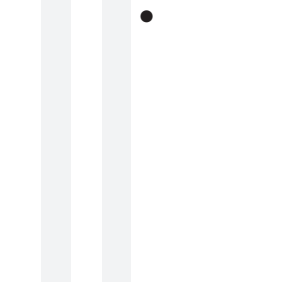



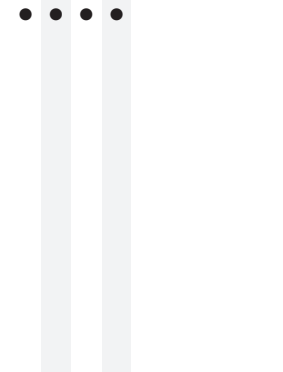
Description	Picture	Order Nr. & Specifications	/ Flip Top Push / Frame Dock / V-Dock / Dock Square / Port Push / U-Dock /
DVI-I Connector Dual-Link, 24 + 5 pole 1/2 Module		9331 8110 0000 with 0.2 m cable and socket 9331 8440 0000 with 3 m cable and plug	● ● ● ● ● ● ● ● ● ●
DVI-I Connector Dual-Link, 24 + 5 pole 1/1 Module		9331 8110 2200 with 0.2 m cable and socket 9331 8440 2200 with 3 m cable and plug	● ● ● ● ● ● ● ● ● ●
HDMI-Connector with gilded contacts 1/2 Module		9331 8540 0000 HDMI 1.4 with socket – socket (without cable) 9331 8120 0000 HDMI 1.4 with 0.2 m cable and socket 9331 9540 0000 HDMI 2.0 with 0.2 m cable and socket 9331 8130 0000 HDMI 1.4 with 3 m cable and plug with 5 m cable and plug 9332 2820 0000 HDMI 2.0 with 3 m cable and plug	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●

FlipTop Push
 FrameDock
 V-Dock
 Dock Square
 Port Push
 U-Dock
 /

Description	Picture	Order Nr. & Specifications	
<p>HDMI-Connector</p> <p>with gilded contacts</p> <p>1/1 Module</p>		<p>9331 8120 2200 HDMI 1.4 with 0.2 m cable and socket</p> <p>9331 9540 2200 HDMI 2.0 with 0.2 m cable and socket</p> <p>9331 8130 2200 HDMI 1.4 with 3 m cable and plug with 5 m cable and plug</p> <p>9332 2820 2200 HDMI 2.0 with 3 m cable and plug</p>	<p>• • • •</p> <p>• • • •</p> <p>• • • •</p> <p>• • • •</p>
<p>Display Port-Connector</p> <p>DP 1.2 compliant</p> <p>1/2 Module</p>		<p>9331 8140 0000 with 0.4 m cable and socket</p>	<p>• • • • •</p>
<p>Display Port-Connector</p> <p>DP 1.2 compliant</p> <p>1/1 Module</p>		<p>9331 8140 2200 with 0.4 m cable and socket</p>	<p>• • • •</p>

Description	Picture	Order Nr. & Specifications	/ FlipTop Push / FrameDock / V-Dock / Dock Square / Port Push / U-Dock /
USB-Connector 3.0		9331 8530 0000 with socket – socket Type A	● ● ● ● ●
USB 3.0 Type A		9331 8650 0000 with 0.2 m cable and socket	● ● ● ● ●
1/2 Module		9331 8460 0000 with 3 m cable and plug	● ● ● ● ●
USB-Connector 3.0 Type A		9331 8650 2200 with 0.2 m cable and socket	● ● ● ●
USB 3.0 Type A		9331 8460 2200 with 3 m cable and plug	● ● ● ●
1/1 Module			
USB-Connector 3.1 Type C		9331 9720 0000 with 0.2 m USB cable and socket	● ● ● ● ●
USB 3.1 type C Suitable just for power supply. Max. current: 3 A			
1/2 Module			
USB-Connector 3.1 Type C		9331 9720 2200 with 0.2 m USB cable and socket	● ● ● ●
USB 3.1 type C Suitable just for power supply. Max. current: 3 A			
1/1 Module			
USB-Connector 3.1 Type C		9332 5170 0000 with 0.5 m USB cable and plug	● ● ● ● ●
USB 3.1 Type C Suitable for power and data supply. 3 A / max. 60 watts up to 5 Gbit / s data			
1/2 module			

FlipTop Push
FrameDock
V-Dock
Dock
Dock Square
Port Push
U-Dock

Description	Picture	Order Nr. & Specifications	
<p>WireLane Adaptor for FlipTop Push</p> <p>to connect the WireLane</p>		<p>9331 8700 0000 black</p>	
<p>Cable Outlet Module</p> <p>for one cable like: Patch cable, audio cable etc.</p> <p>1/1 Module</p>		<p>9331 8230 0000 Empty module, without cable</p>	
<p>Cable Outlet Module</p> <p>for one cable like: Patch cable, audio cable etc.</p> <p>1/2 Module</p>		<p>9332 0100 0000 Empty module, without cable</p>	
<p>Cable Outlet Module 5 fold</p> <p>for 5 cables; 4 passages 10 mm 1 passage 20 mm</p> <p>1/1 Module</p>		<p>9332 5060 0000 black</p> <p>9332 5060 0010 white</p>	
<p>Installation Space</p> <p>Profile to enable later insertation of interchangeable modules</p> <p>1/1 Module</p>		<p>9331 8300 0000</p>	

Description


Picture

Order Nr. & Specifications


**Installation Space
for EVoline Port Push**

Profile to enable later insertion of
interchangeable modules

1/2 Module



9332 1410 0000





EVOLine® Consolidation Point


The pivotal point of the system.

The modern work life becomes more and more flexible. Nowadays adaptable spaces along with mobile furniture and equipment within individually created work areas are standard in many offices already.


A conventional approach usually reaches its limits because of the services infrastructure.



The essential importance of a flexible power supply is often un-

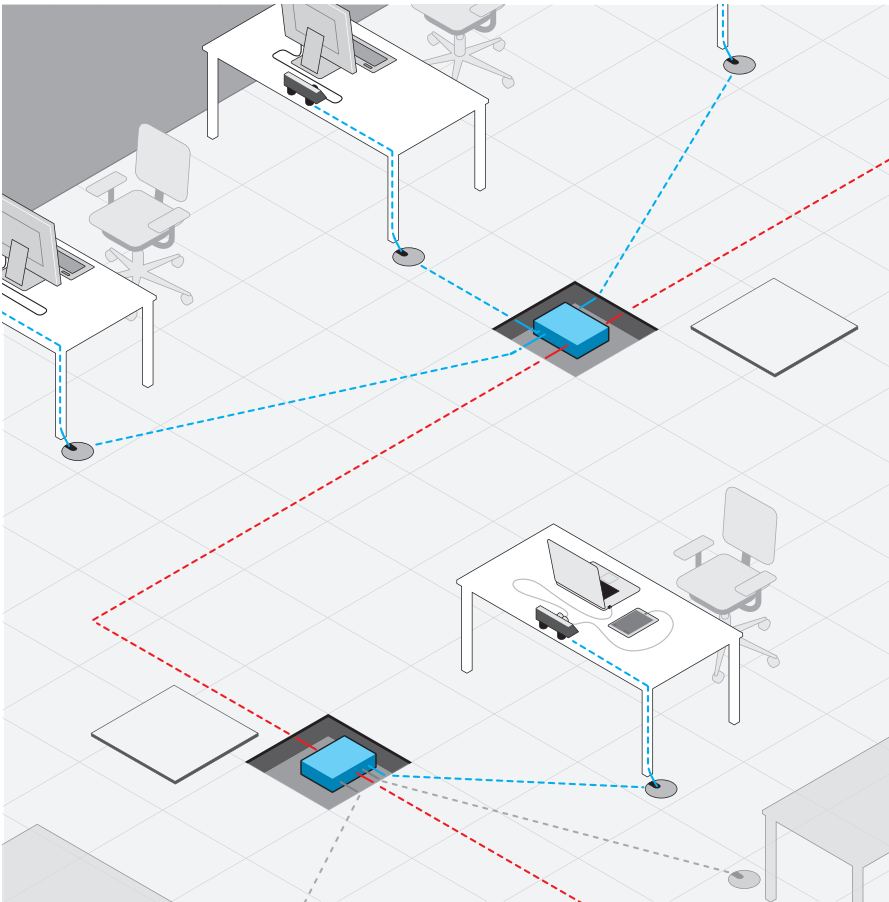derestimated during the planning stages. Long-term consequences can often result in cable chaos with potentially fatal safety defects, questionable auxiliary structures or expensive new cable supplies.

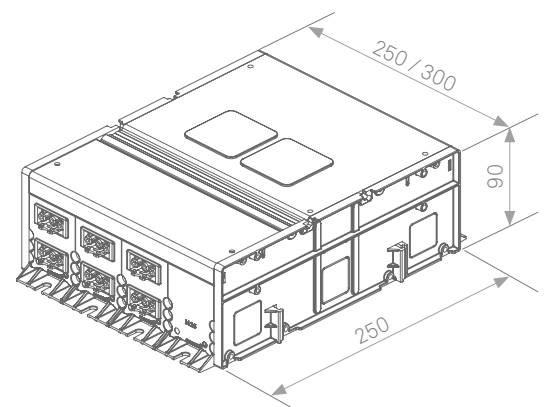

The perfect solution: Decentralised Electrical Distribution from Schulte Elektrotechnik.



Description	Picture	Specifications	Order Number
<p>EVOLine Consolidation Point Power Mini</p> <p>For the power supply of workspaces and electrical devices; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 250mm × 250 mm × 90mm</p>		<p>Input side: 1× cable gland M25</p> <p>Built-in devices: 1× RCD Rated current: 40 A Rated residual current: 30 mA 3× MCB Rated current: 16 A Characteristic: B</p> <p>Output side: 3 × 3-pole socket (WAGO WINSTA) for the connection of electrical consumers</p>	1594 2000 2300
<p>EVOLine Consolidation Point Power Maxi</p> <p>For power supply of workspaces and electrical devices; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 300mm × 250 mm × 90mm</p>		<p>Input side: 1× cable gland M25</p> <p>Built-in devices: 1× RCD Rated current: 40 A Rated residual current: 30 mA 3× MCB Rated current: 16 A Characteristic: B</p> <p>Output side: 6× 3-pole socket and 1× 5-pole socket (WAGO WINSTA) for the connection of electrical consumers</p>	1594 2000 2400







Remote on/off control without cable or battery from a distance.

EVoline Kinetics modules make it possible. Touching the switch with a finger generates enough energy to send an encoded wireless signal as far as 30 metres in enclosed spaces.



The EVoline receiver can be integrated into our products to switch electrical sockets. The transmitters can also be installed in EVoline products. Alternatively, they can be freely positioned with a mounting frame.



Description	Picture	Order Nr. & Specifications	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; gap: 5px;"> / Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up </div> </div>
<p>Kinetics Wireless Receiver 2 pole module</p> <p>switching states ON/OFF, with display switching status, green, 230 V- Actuator</p> <p>Switching capacity of max. 16 A, switches devices such as lights, for EnOcean Alliance transmitters</p> <p>installation dimensions: 75 x 50 mm</p>		<p>9330 6400 0000</p> <p>Module may be ordered in assembled products</p>	
<p>Kinetics Wireless Transmitter Built-in module</p> <p>Controls all receivers of the EnOcean Alliance. Range up to 30 m.</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 6420 0000</p> <p>with 1 rocker switch and 1 labelling field</p> <p>9330 6410 0000</p> <p>with 2 rocker switches and 2 labelling fields</p>	
<p>Kinetics Wireless Transmitter with frame</p> <p>to switch on/off Controls all EnOcean receivers, range up to 30 m</p> <p>Installation dimensions: 60 x 65 mm</p>		<p>1599 0907 6900</p> <p>with 1 rocker switch and 1 labelling field, black frame</p> <p>1599 0907 8200</p> <p>with 1 rocker switch and 1 labelling field, pure white frame</p> <p>1599 0907 6800</p> <p>with 2 rocker switches and 2 labelling fields, black frame</p> <p>1599 0907 8100</p> <p>with 2 rocker switches and 2 labelling fields, pure white frame</p>	



EVoline® Cable management

Cable management

Functionality and design should not stop at the edge of the desk. The desk looks good from every side with the Cable management solutions from EVoline.



EVoline Bridge



The EVoline Bridge tidies up the cable routing. The rail is rigid, suitable for rolling over and so flat that no tripping hazard arises. Power and data cables are laid separately in two compartments in their sturdy anodised aluminium housing.

EVoline WireLane

With EVoline WireLane, all cables run in orderly tracks. The plastic under-the-table channel is screwable, linkable and flexible. Individual links can be connected or disconnected.



EVoline Rail



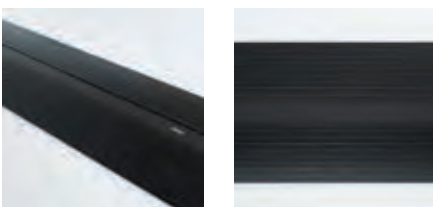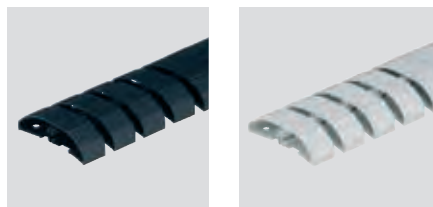

Not all power and data connections need to be accessible on the desk-top. In the case of representative tables, even a completely free area is often desired. EVoline Rail helps with under-the-table mounting, not least with the practical clip for fastening the WireLane.



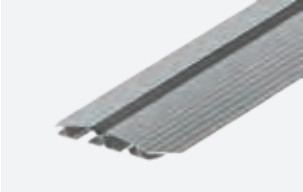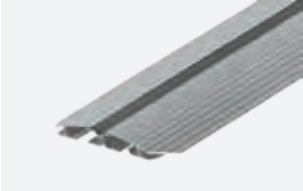









Also available in black



Description	Picture	Specifications	Order Number
<p>Bridge Module Arc 90°</p> <p>includes 4 Fixing bolt</p>			1593 5090 0600
<p>Bridge Module T</p> <p>includes 6 Fixing bolts</p>			1593 5090 0500
<p>Bridge Module Cross</p> <p>includes 8 Fixing bolts</p>			1593 5090 0200
<p>Bridge Module Adaptor WireLane</p> <p>can also be used as end piece.</p>			1593 5090 0100
<p>Bridge Module Vertical</p>			1593 5090 0400
<p>Bridge Connectors</p> <p>2 Pieces</p>			1593 5090 0300






Description	Picture	Specifications	Order Number
<p>EVOLine Bridge</p> <p>cable cover made of aluminium for screw fixing, with black trim, without screws</p>		<p>4 CableClips</p> <p>Length 500 mm: Profil silber Profil schwarz</p> <p>Length 800 mm: Profil silber Profil schwarz</p> <p>Length 1.200 mm: Profil silber Profil schwarz</p>	<p>1593 5010 5000 1593 5030 5000 1593 5010 8000 1593 5030 8000 1593 5011 2000 1593 5031 2000</p>
<p>EVOLine Bridge</p> <p>cable cover made of aluminium With double-sided tape with black trim</p>		<p>4 CableClips</p> <p>Length 500 mm: Profil silber Profil schwarz</p> <p>Length 800 mm: Profil silber Profil schwarz</p> <p>Length 1.200 mm: Profil silber Profil schwarz</p>	<p>1593 5020 5000 1593 5040 5000 1593 5020 8000 1593 5040 8000 1593 5021 2000 1593 5041 2000</p>
		<p>8 CableClips</p> <p>Length 1.600 mm: Profil silber Profil schwarz</p> <p>Length 2.000 mm: Profil silber Profil schwarz</p>	<p>1593 5011 6000 1593 5031 6000 1593 5012 0000 1593 5032 0000 1593 5021 6000 1593 5041 6000 1593 5022 0000 1593 5042 0000</p>








Description	Picture	Specifications	Order Number
<p>EVoline WireLane</p> <p>under desk cable channel made of plastic. The elements can be linked and separated.</p> <p>Width: 80 mm</p>		<p>Length: 750 – 1000 mm</p> <p>Colour: black Colour: lightgrey</p>	<p>6593 5201 0000 6593 5211 0000</p>
<p>EVoline WireLane Strain Relief</p> <p>in black plastic with two clamps for cable</p>			<p>6593 5290 0100</p>
<p>EVoline CableFlex</p> <p>Plastic tube for cables. Black</p>		<p>Ø 15 mm, Length 50 m Ø 20 mm, Length: 30 m Ø 25 mm, Length: 20 m</p>	<p>6593 5300 0100 6593 5310 0100 6593 5320 0100</p>
<p>EVoline CableFlex</p> <p>Insertion tool</p>		<p>Ø 15 mm Ø 20 mm Ø 25 mm</p>	<p>6593 5390 0100 6593 5390 0200 6593 5390 0300</p>







Description	Picture	Specifications	Order Number
<p>EVOLine Rail</p> <p>For under desk installation, For EVOLine U-Dock and EVOLine Express. Bespoke profile lengths available upon request.</p>		<p>for EVOLine U-Dock</p> <p>2 black plastic brackets with 2 aluminium profiles</p> <p>Profile length 150 mm 1593 5400 0700 Profile length 300 mm 1593 5400 0100 Profile length 500 mm 1593 5400 0200</p>	
		<p>3 black plastic brackets with 4 aluminium profiles</p> <p>Profile length 2 x 300 mm 1593 5400 0500 Profile length 2 x 400 mm 1593 5400 0600</p>	
		<p>For EVOLine Express</p> <p>2 black plastic brackets with 2 aluminium profiles</p> <p>Profile length 165 mm 1593 5400 0300 (for 3-gang)</p> <p>Profile length 215 mm 1593 5400 0400 (for 4-gang)</p>	
		<p>Individual</p> <p>1 black plastic brackets for EVOLine Express 9331 6230 0000</p>	
		<p>1 black plastic brackets for EVOLine U-Dock 9331 6220 0000</p>	
		<p>1 Pair Aluminium profiles per 100 mm 9331 6210 0000</p>	




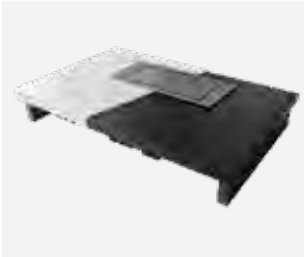
Description	Picture	Specifications	Order Number
<p>Cable Passage EVoline Port</p> <p>Aluminium housing, silver anodised Without modules</p> <p>Mounting hole \varnothing 102 mm</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1002 5301
		<p>Rocking cover and collar made of black lacquered plastic</p>	1593 1003 2601
		<p>Rocking cover made of solid stainless steel in CD-look, collar made of plastic, painted to match</p>	1593 1003 2701
<p>Cable Outlet-Modul</p> <p>1 cable passage</p> <p>installation dimensions: 50 x 50 mm</p>		<p>\varnothing 8 mm</p>	9331 3790 0000
		<p>\varnothing 12 mm</p>	9331 0560 0000
		<p>\varnothing 17 mm</p>	9331 1670 0000
		<p>Other \varnothing on request</p>	
<p>Cable Outlet-Modul</p> <p>2 cable passages</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>\varnothing 8 mm</p>	9331 3800 0000
		<p>\varnothing 12 mm</p>	9331 1930 0000
		<p>Other \varnothing on request</p>	
<p>Cable Guide-Modul</p> <p>for EVoline Port</p> <p>Clamp for 3 cables</p> <p>2x 8 mm</p> <p>1x 12 mm</p> <p>Colour: black</p> <p>Installation dimensions: 25 x 50 mm</p>			9331 3600 0000

Description	Picture	Specifications	Order Number
<p>Empty Floor Outlet</p> <p>cable passage for installation in double and cavity floors, cover with bracket for EVOLine WireLane.</p> <p>Installation dimensions: Ø 125 mm</p>		<p>black lightgrey</p>	<p>1594 9000 0000 1594 9100 0000</p>
<p>Floor Outlet</p> <p>with electrical socket insert</p> <p>VDE-compliant, black, with contact protection, with 3.0 m cable and plug GST18, cover with bracket for EVOLine WireLane</p> <p>Installation dimensions: Ø 125 mm</p>		<p>Cover black Cover lightgrey</p>	<p>1594 9000 0100 1594 9100 0100</p>

Description	Picture	Specifications	Order Number
<p>Mounting Clamp</p> <p>twist-proof including non-slip covering Colour: black for profiles: Dock, U-Dock, R-Dock</p>		<p>Span width 8 – 40 mm</p> <p>Span width 8 – 40 mm, 2×</p> <p>Span width 40 – 75 mm</p> <p>Span width 40 – 75 mm, 2×</p>	<p>1599 0902 1200</p> <p>1599 0902 0500</p> <p>1599 0902 1300</p> <p>1599 0902 1000</p>
<p>Mounting Clamp</p> <p>twist-proof including non-slip covering Colour: white for profiles: Dock, U-Dock, R-Dock</p>		<p>Span width 8 – 40 mm</p> <p>Span width 8 – 40 mm, 2×</p> <p>Span width 40 – 75 mm</p> <p>Span width 40 – 75 mm, 2×</p>	<p>1599 0909 3300</p> <p>1599 0909 5600</p> <p>1599 0909 3900</p> <p>1599 0909 5700</p>
<p>Stainless Steel Mounting Clamp</p> <p>twist-proof desk clamp installed and secured with allen screws. For profiles: Dock, U-Dock, R-Dock, V-Dock</p>		<p>Span width 18 – 25 mm</p>	<p>1599 0909 1500</p>
<p>Mounting set for under cabinet installation</p> <p>consists of two EVOLine Dock brackets with wood screws screw: 3.5 x 15 mm</p>			<p>1599 0903 8300</p>
<p>Mounting set for desk installation</p> <p>consists of two EVOLine Dock brackets with wing nut screws screw: M4 x 40 mm</p>			<p>1599 0903 8200</p>

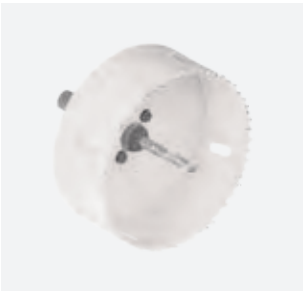Description	Picture	Specifications	Order Number
<p>Stainless Steel Pillar</p> <p>Steel pillar for EVoline Docks consisting of: stainless steel sleeve, screw, nut, washer and rubber seal for profiles: Dock, R-Dock, U-Dock</p>		Material : Stainless steel for surface thickness up to 50 mm	1599 0906 0700
<p>Angle Profile</p> <p>for fixing of EVoline V-Dock</p>		Length: 100 mm Length: 60 mm	1599 0908 4400 1599 0909 6400
<p>EVoline Stainless steel clamps</p> <p>2 pieces, for fastening the Dock Square. For an optimal clamping effect, the clamps are simply pushed completely into the base.</p>		with knurled screws Clamping range: 15 - 30 mm with hexagon sockets Clamping range: 20 - 30 mm	1599 0912 0200 1599 0912 0400
<p>EVoline Quicklock Pro</p> <p>fixing system with a concealed cable channel and 2 fasteners, for surface thickness of 18 to 32 mm, installation without tools, fasteners with protective underlay for profiles: EVoline Dock, EVoline R-Dock</p>		Length: 100 mm without bracket length: 150 mm includes bracket for Wire-Lane connection length: 200 mm includes bracket for EVoline WireLane connection	1599 0910 8500 1599 0910 8300 1599 0910 8400
		Mounted on product	
		profile min. length: 100 mm price unit: 100 mm	9331 6700 0000
		Fastening element	9332 0300 0000
		WireLane bracket usable from 150 mm profile length	9331 6720 0000

Description	Picture	Specifications	Order Number
<p>Double Sided Strip for EVOLine Dock Square</p> <p>2× Double Sided Strips Removable without residue.</p>			9332 1050 0000
<p>EVOLine Rubber gasket</p> <p>fits under the collar of the EVOLine Port.</p>			1599 0903 9100
<p>EVOLine Laptop Secure</p> <p>Sturdy mounting lug for commercial laptop anti-theft devices. Such as Kensington Lock.</p>		<p>Die-cast, silver-colored Length: 41 mm Breite: 9 mm Höhe: 22 mm</p>	9331 3140 0000
<p>EVOLine Laptop Secure</p> <p>Sturdy attachment loop for standard laptop theft protection Such as Kensington Lock.</p>		Silver-colored	9331 6030 0000
<p>EVOLine Hole Saw</p> <p>For precise installation.</p>		<p>Mounting hole Ø 102 mm (for EVOLine Port)</p> <p>Mounting hole Ø 83 mm (for EVOLine Square80)</p> <p>Mounting hole Ø 54 mm (for EVOLine One)</p>	1599 0901 7000
<p>EVOLine Unlocking Tool for interchangeable modules</p>			6599 0911 1300

Description	Picture	Specifications	Order Number
<p>EVoline sample display</p> <p>Fully functional, equipped with EVoline BackFlip, Circle80, FlipTop Push S, FrameDock, Qi Charger, One, Square80.</p> <p>With carrier bag made of robust tarpaulin incl. shoulder strap.</p> <p>Without connecting cable.</p>		<p>VDE</p> <p>International</p> <p>Bag separate, without display.</p> <p>Felt insert for bag, for carrying smaller displays or products.</p>	<p>WM65 9909 1157</p> <p>WM65 9909 1161</p> <p>WM65 9909 1169</p> <p>WM65 9909 1181</p>
<p>EVoline sample display One</p> <p>Sample display for installation demonstration.</p> <p>With 3 EVoline One sockets: surface-mounted, flush-mounted, with cover.</p>		<p>VDE</p> <p>UK</p> <p>B/F</p> <p>CH 10 A</p>	<p>WM65 9909 1163</p> <p>WM65 9909 1164</p> <p>WM65 9909 1165</p> <p>WM65 9909 1166</p>
<p>EVoline sample display One Upholstery installation</p> <p>Sample display for installation demonstration of the EVoline One in an upholstered piece of furniture.</p>		<p>Flat upholstery</p> <p>High upholstery</p>	<p>WM65 9909 1179</p> <p>WM65 9909 1180</p>
<p>EVoline sample display Backflip</p> <p>Sample display for the surface-mounted and flush-fitting demonstration of the backflip and the plug cabling on the back.</p> <p>Can be set up, fits in a felt insert and sample bag.</p>		<p>VDE</p> <p>B/F</p> <p>CH-10 A</p> <p>UK</p>	<p>WM65 9909 1224</p> <p>WM65 9909 1225</p> <p>WM65 9909 1226</p> <p>WM65 9909 1227</p>

EVoline® Decentralised electrical distribution

Our philosophy:

**Switching and protection
as close as possible to the
consumer.**

That's how it's still installed today:

100 years of central electrical
distribution:
Huge distribution cabinets, cable
chaos in the floor and below the
ceiling.




Plan and install with EVoline:

Decentralised switching and
protection
Cost savings of over 40 %
Fire load reduction up to 80%
Tidiness and flexibility are
free of charge.



The EVoline Consolidation Point:

The pivotal point of the system.

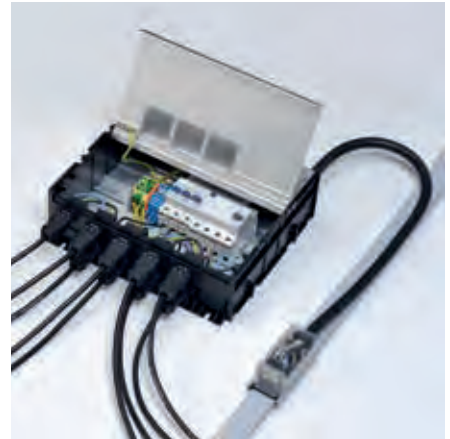

**Call us!
We'd be glad to advise you.**


EVOLine® Green buildings

Take a look at how we replaced “100 years of electrical engineering“.

Schulte Elektrotechnik is a pioneer of innovative building infrastructure under the heading: “Decentralised electrical distribution”.



Kilometres of unnecessarily laid cables were saved. In our new building you will search in vain for central control cabinets, switches and sockets on the wall and ceiling lights, as well as the usual standard grid of floor boxes. Cost-effective branch lines replace the cable bundles of a radial electrical distribution system. You can experience the EVOLine philosophy live in our “Living Office”.

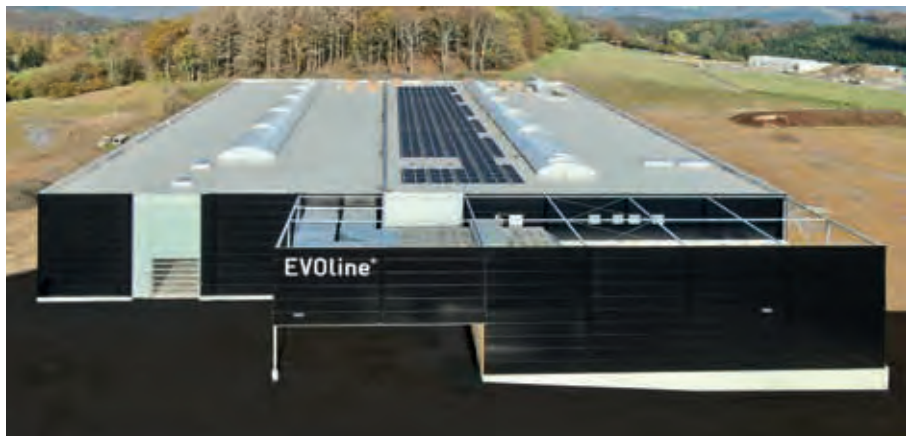

Our new pilot project:
4,200 m² of energy self-sufficient
production building .

**We look forward to
your visit!**

EVOLine®

Schulte Elektrotechnik GmbH & Co. KG

Jüngerstraße 21
D-58515 Lüdenscheid

phone +49 23 51 / 94 81-0
fax +49 23 51 / 4 26 58

mail info@schulte.com
internet www.evoline.com



EN WM6599091208
Issued: 10/2020

Subject to technical changes and printing errors | Illustrations similar.